



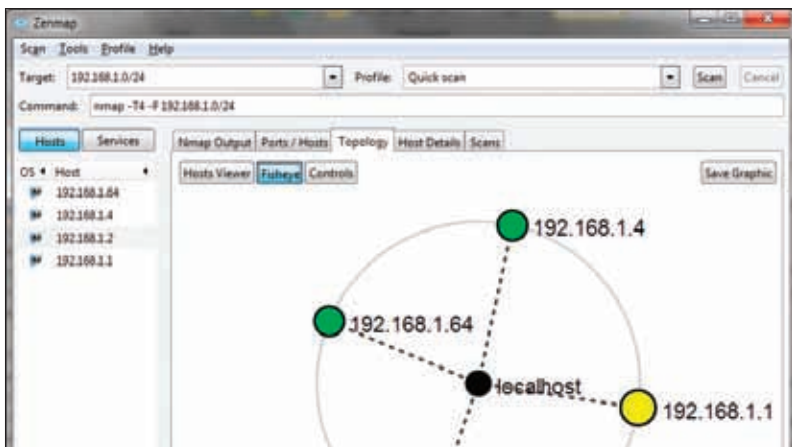

Zenmap showing the topology of interconnected computers on the network.

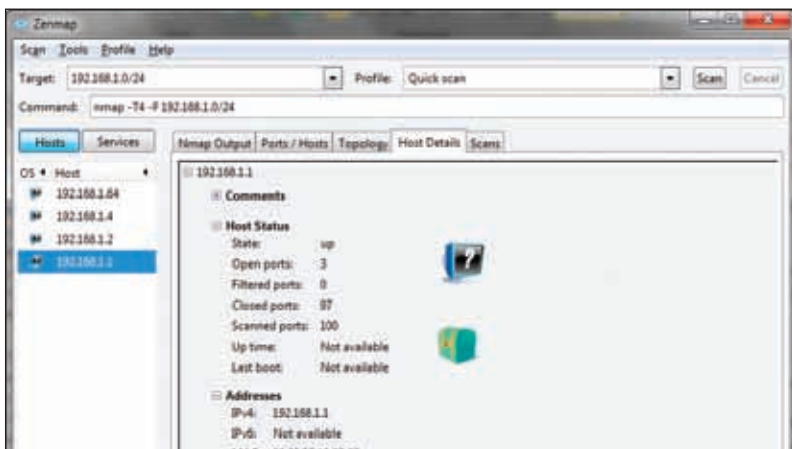

Zenmap showing details of the selected host

unnecessary services, and to ensure that the others are running without root or administrative privileges to dampen the extent of any hack.

3.1.4 Enumeration / Banner Grabbing

By this time we know the systems we can attack, the operating systems of these systems, the ports open on these systems and perhaps the services running on these ports. Now in order to construct an attack a hacker will need to know the vulnerabilities in the services and operating system the target systems are running.