

Delay command illustrated before, the number indicates seconds

```
echo "I shall sleep now for 20 seconds"
```


```
sleep 20
```

```
echo "Exit Bash Trap Example!!!"
```

In the above example, we have illustrated the usage of clear and sleep command also.

If - else - fi

We will begin with an example, that too with a nested if - else -fi, it is extremely simple to understand, we have heavily commented the code for better understanding.

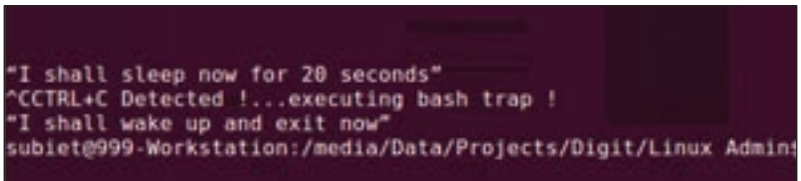

```
"I shall sleep now for 20 seconds"
^CTRL+C Detected !...executing bash trap !
"I shall wake up and exit now"
subiet@999-Workstation:/media/Data/Projects/Digit/Linux Admini
```

Bash trap is as important as unimportant you currently think it is.

Consider the following example where we input a user name and display the password of the user, if the file `username.txt` exists that contains the password of the user, else we give the option to the user to create that file and store it with password for future reference.

```
#!/bin/sh
```

```
# Prompt for a user name...
```

```
echo "Please enter your name:"
```

```
read USERNAME
```

```
# Check for the file. We are using the -s option here,
more will be illustrated # later
```

```
if [ -s ${USERNAME}.txt ]; then
```

```
# Read the password from the file.
```

```
passwd=`cat ${USERNAME}.txt`
```

```
echo "Your stored password is $passwd"
```

```
else
```

```
# Asking if he wants to create it
```