


```
>
-le
<=
-ge
>=
-eq
==
-ne
!=
```

```
#!/bin/bash
# Variable Declaration
```

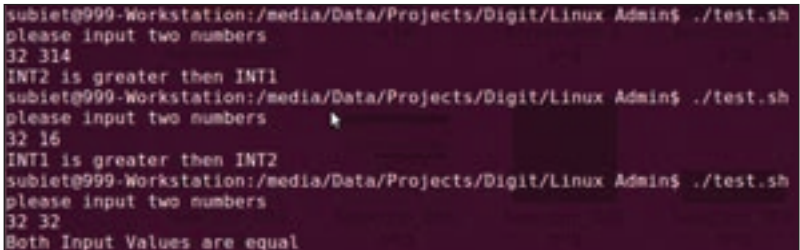

```
subiet@999-Workstation:/media/Data/Projects/Digit/Linux Admin$ ./test.sh
please input two numbers
32 314
INT2 is greater then INT1
subiet@999-Workstation:/media/Data/Projects/Digit/Linux Admin$ ./test.sh
please input two numbers
32 16
INT1 is greater then INT2
subiet@999-Workstation:/media/Data/Projects/Digit/Linux Admin$ ./test.sh
please input two numbers
32 32
Both Input Values are equal
```

Output for the second program

```
INT1=2
INT2=2
if [ $INT1 -eq $INT2 ]; then
    echo "Both Values supplied are equal"
else
    echo "Values supplied are NOT equal"
fi
```

The above will always result in the following output below, courtesy the fixed values, in the next example we will take user input values

```
$ Both Values supplied are equal
```

```
#!/bin/bash
# Requesting use for input variables
echo please input two numbers
read INT1 INT2

if [ $INT1 -eq $INT2 ]; then
    echo "Both Input Values are equal"
```