


```
#!/bin/bash
loop_cnt=10
# bash while loop
while [ $loop_cnt -gt 0 ]; do
    echo Value of loop_cnt is: $loop_cnt
    let loop_cnt=loop_cnt-1
done
```

gives the output as:

```
Value of loop_cnt is: 10
Value of loop_cnt is: 9
Value of loop_cnt is: 8
Value of loop_cnt is: 7
Value of loop_cnt is: 6
Value of loop_cnt is: 5
Value of loop_cnt is: 4
Value of loop_cnt is: 3
Value of loop_cnt is: 2
Value of loop_cnt is: 1
```

We have skipped the **Until** loop which is very similar to the **while** loop, except for checking of initial condition. Now we have covered two loops, let us take a look at **select** and **case**, again illustrating via an example should familiarise you quickly with these useful tools.

```
#!/bin/bash
# PS3 is a voodoo word, don't disturb. I am serious.
PS3='Select one thing '
# bash select example
select content in "Digit Magazine" "DVDs" "Fast Track"
"Nothing"
do
    echo "You have selected $content out of the whole
digit package"
    # Break the infinite loop.
```

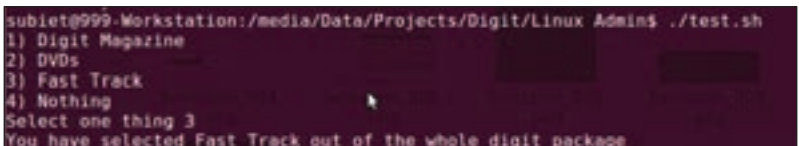

```
subiet@999-Workstation:/media/Data/Projects/Digit/Linux Admin$ ./test.sh
1) Digit Magazine
2) DVDs
3) Fast Track
4) Nothing
Select one thing 3
You have selected Fast Track out of the whole digit package
```

Illustration of select