


```
ul a:hover {  
color:#F00;  
}  
ul a:active {  
color:#333;  
}
```

So far, the link text is changing depending on the link state, but you can also change the colour of the whole link background on hover. This is simply

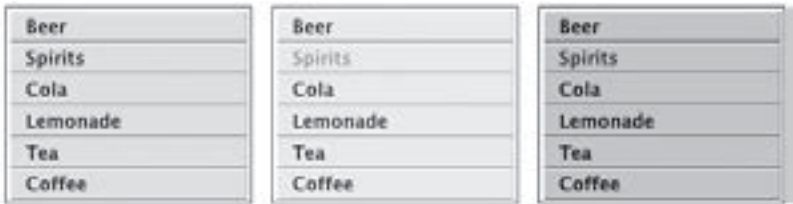

Link States (a) Link, (b) Visited, (c) Hover

done by declaring a background colour in the appropriate pseudo class. In the following CSS, the hover pseudo class is given a white background:

```
ul a:hover {  
color:#F00;  
background:#FFF;  
}
```

As a result, when the mouse is placed over a link, the text turns red, and the whole background of the list item becomes white. Obviously, you could also define a background colour for visited links or any pseudo classes.

The final trick is to highlight a link if you are actually viewing that page. For static web pages, this requires a particular link to be identified by adding a unique ID to the parent list element. With dynamic systems such as content management systems and languages such as PHP, the unique ID could be added in a more convenient fashion by testing for the current page based on the URL or other identifier, and placing the ID accordingly.

Let's say that for the Lemonade page, you wish to reflect that the user is actually viewing that page, and therefore make it obvious that clicking that link again would be pointless. All that is needed is for the unique ID to be added to that particular list element.