


```
</string>
<string name="respondMaydayButtonText">MAYDAY! MAYDAY! MAYDAY!
</string>
<string name="respondAllClearText">I am safe and well. Worry not!
</string>
<string name="respondMaydayText">Tell my mother I love her.
</string>
<string name="querystring">are you ok?</string>
</resources>
```

At this point, the GUI will be complete, so starting the application should show you the following screen:

5. Create a new `ArrayList<String>` within the `EmergencyResponder` Activity to store the phone numbers of the incoming requests for your status. Bind the `ArrayList` to the List View, using an `Array Adapter` in the Activity's `onCreate` method, and create a new `ReentrantLock` object to ensure thread-safe handling of the `ArrayList`.
6. Take the opportunity to get a reference to the `CheckBox` and to add `ClickListeners` for each of the response buttons. Each button should call the `respond` method, while the `Setup Auto Responder` button should call the `startAutoResponder` stub.

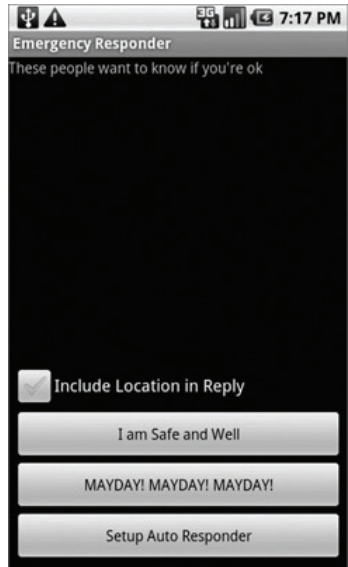

Emergency Responder app

```
ReentrantLock lock;
CheckBox locationCheckBox;
ArrayList<String> requesters;
ArrayAdapter<String> aa;

@Override
public void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.main);
```