

the response strings you defined as resources in Step 4. Fire the SMS using an overloaded respond method that you'll complete in the next step.

```
public void respond(boolean _ok,
boolean _includeLocation) {
    String okString = getString(R.
string.respondAllClearText);
    String notOkString = getString(R.
string.respondMaydayText);
    String outString = _ok ? okString
: notOkString;


    ArrayList<String> requestersCopy
=
    (ArrayList<String>) requesters.
clone();
```

```
    for (String to : requestersCopy)
        respond(to, outString, _includeLocation);
}
```

```
private void respond(String _to, String _response,
boolean _includeLocation) {}
```

12. Update the respond method that handles the sending of each response SMS. Start by removing each potential recipient from the "requesters" ArrayList before sending the SMS. If you're responding with your current location, use the Location Manager to find it before sending a second SMS with your current position as raw longitude/latitude points and a geo-coded address.

```
public void respond(String _to, String _response,
boolean _includeLocation) {
    // Remove the target from the list of people we
    // need to respond to.
    lock.lock();
    requesters.remove(_to);
```

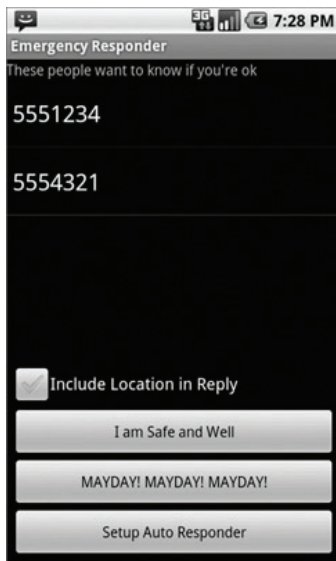

You can key in emergency numbers too