


apt-get is the tool you have to use. You can also use the aptitude program for the same. While apt-get gets the work done, some people are in favour of using aptitude for the same. One of the reasons which are prime is that aptitude is more clever in software removal and would also remove those dependencies installed while installing the software package which would not have any program dependent on themselves after the removal of a package. To remove package using apt-get, use:

- `sudo apt-get remove <package _name>`

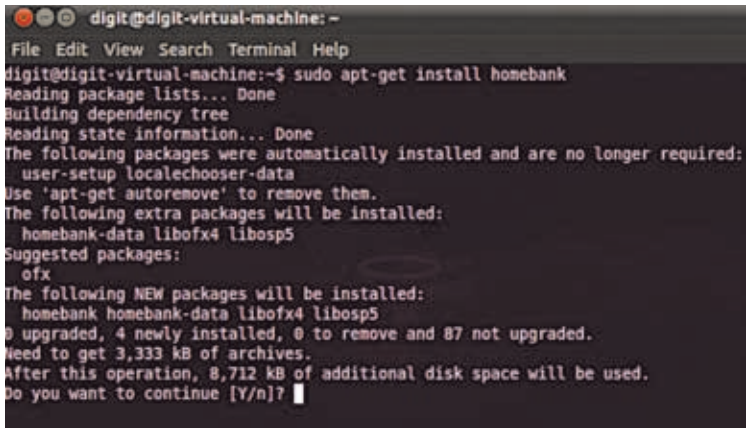

```

digit@digit-virtual-machine: ~
File Edit View Search Terminal Help
digit@digit-virtual-machine:~$ sudo apt-get install homebank
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  user-setup localechooser-data
Use 'apt-get autoremove' to remove them.
The following extra packages will be installed:
  homebank-data libofx4 libosp5
Suggested packages:
  ofx
The following NEW packages will be installed:
  homebank homebank-data libofx4 libosp5
0 upgraded, 4 newly installed, 0 to remove and 87 not upgraded.
Need to get 3,333 kB of archives.
After this operation, 8,712 kB of additional disk space will be used.
Do you want to continue [Y/n]?

```

Command your way: Trying to install HomeBank using apt-get

For example, to remove nmap, the command will be:

- `sudo apt-get remove nmap`

To use aptitude, you need to slightly change the command. You should be using the 'purge' keyword as below:

- `sudo aptitude purge <package _name>`

Once again let us remove nmap from system. The command would be:

- `sudo aptitude purge nmap`