


- `<s:GradientEntrycolor="#000000"/>`
- `<s:GradientEntrycolor="#ffffff"/>`
- `<s:GradientEntrycolor="#000000"/>`
- `<s:GradientEntrycolor="#ffffff"/>`
- `<s:GradientEntrycolor="#000000"/>`
- `</s:entries>`
- `</s:LinearGradientStroke>`
- `</s:stroke>`
- `</s:Line>`

The resulting line will have alternating black and white colours.

Drawing rectangular and elliptical shapes

The two most commonly used primitive vector graphic classes are `Rect` and `Ellipse`. Respectively, they render rectangular and elliptical shapes on the screen. Both support fill and stroke properties, which enable you to define the outer border and inner fill of the shape you're drawing. Each shape's fill property can be set to an instance of a class that implements the `IFill` interface.

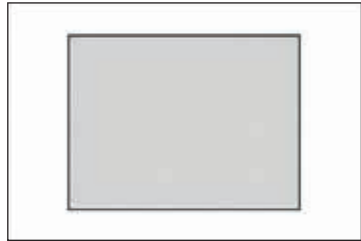

A simple rectangle with a light gray fill and a black stroke. It is defined as an instance of the `Rect` class

And, as described in the previous section on the `Line` class, each shape's stroke property is set to an instance of a class that implements the `IStrike` interface. The following MXML code defines a rectangle with dimensions of 400 pixels width by 300 pixels height. The rectangle's outer border is a solid black line with a weight of 2 pixels, and the fill is a solid light gray:

- `<s:Rect width="400" height="300"`
- `horizontalCenter="0" verticalCenter="0" >`
- `<s:fill>`
- `<s:SolidColorcolor="#EEEEEE"/>`
- `</s:fill>`
- `<s:stroke>`
- `<s:SolidColorStrokecolor="#000000" weight="2"/>`
- `</s:stroke>`
- `</s:Rect>`