


which you'll use for debugging and testing. The production version of the application is created in a separate step after the project has been created.

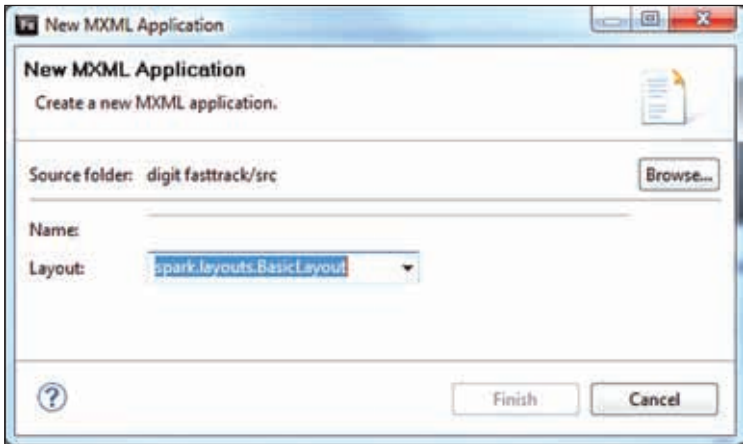

The 'New MXML Application' Window

When you create a project without an associated application server, the output folder is created as a subfolder of the project root. For Web applications, you then test the application by loading it into the browser from the local file system. For projects that do use an application server, the output folder is created within the document root folder of the testing Web server, and the application is loaded from the server with an HTTP request.

Components and Controls - Understanding Flash Builder's user interface

Flash Builder 4.5 adds unique tools to Eclipse to facilitate Flex application development. These tools include Editors and Views. Flash Builder includes two editors you can use when creating your Flex applications.

MXML Editor

The MXML editor is used to work with MXML files, whether they represent application files or custom components. When you open an MXML file that's associated with a currently open project, the file is always opened in the MXML editor. This editor has two different modes: Source mode and