

icon-uri – This URI is a pointer to an icon (*.ico file) that will be displayed to the left of the task name in the Jump List.


Both of the URIs can be absolute or relative. For the action-uri, any destination is valid; this is not bound to the domain of the webpage like the Start URL property.

Putting this all together, here is what a single Jump List task might look like in your HTML:

- `<meta name="msapplication-task" content="name=Locations;`
- `action-uri=http://www.consumermate.com/Location.aspx;`
- `icon-uri=http://www.consumermate.com/favicon.ico"/>`

In the Jump List, this task will look like the first task below:

When you click on the “Locations” task, you will be taken to <http://www.consumermate.com/Location.aspx>. The little Windows-like icon next to the “Locations” task was pulled in from <http://www.consumermate.com/favicon.ico> (the icon-uri).

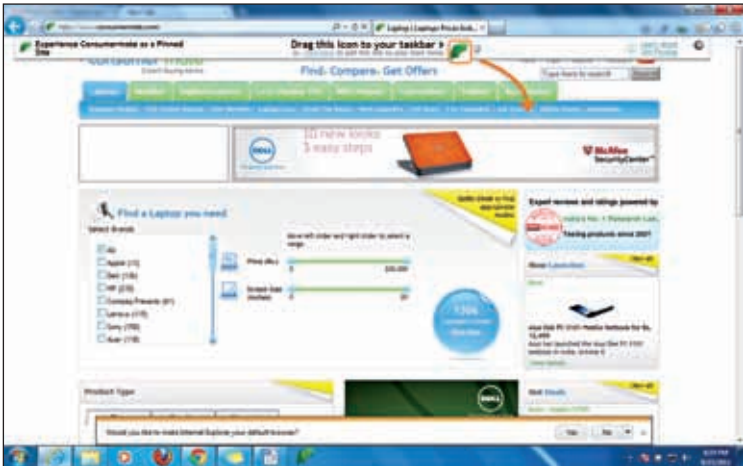

Implementing dynamic Jump Lists

Jump List categories are similar to Jump List tasks, except with categories, you can define your own heading (or category) for the items in the Jump List. They can be used to surface information specific to a user, notifications, or the user's history. For example, on a news portal, the site could build up a “Recently Viewed” category in the Jump List and include perhaps the last 5 articles viewed on the site.