


1. Exit the bada IDE.
2. If you have already installed JRE or JDK, remove the `\<BADA_SDK_HOME>\IDE\jre` directory.
3. In case you haven't installed JRE or JDK, move the jre directory from `\<BADA_SDK_HOME>\IDE` to `\<BADA _ SDK _ HOME>`. Add `\<BADA_SDK_HOME>\jre\bin` to the PATH environment variable.
4. Start the bada IDE.
5. In the bada IDE menu, go to **Help > Check for Updates**.
6. If an update for the bada IDE is found, select it and click Next to continue and complete the installation process.
7. If you've moved the jre directory from `\<BADA_SDK_HOME>\IDE` to `\<BADA_SDK_HOME>` before installing the updates, move it back to `\<BADA_SDK_HOME>\IDE` and remove `\<BADA _ SDK _ HOME>\jre\bin` from the PATH environment variable.

Emulator

The Emulator emulates a target device running bada applications. It enables you to use target device-optimized environment to debug and test your

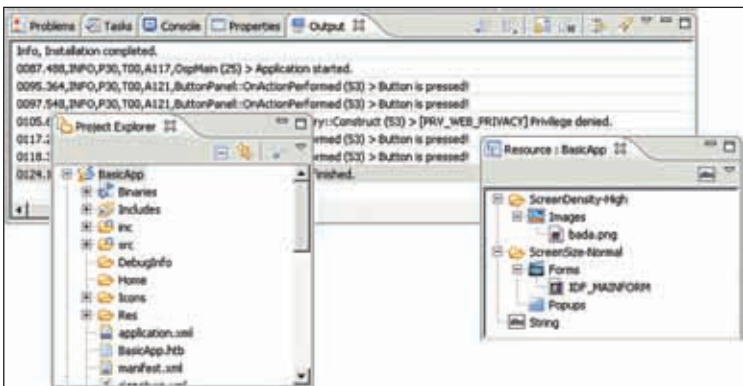

Working on the bada IDE

application on your local machine before deploying it to the real target device. The Emulator uses native debuggers that enable you to control your application's execution.

The Emulator supports the emulation of the real device functionality, including multi-point touch, codecs, camera, and OpenGL® ES.