


the <ProjectName>Entry.cpp file. The program counter has problems when stepping out during debugging in the OspMain() event handler because the OspMain() event handler is the entry point for bada applications, and the upper call stack is the Windows ntdll.dll library.

2. To stop debugging, do one of the following:

- In the bada IDE, in the Console or Debug view, click the Terminate button. If the application execution is not suspended before you click the Terminate button, touch an arbitrary control on the screen or press a hard key on the Emulator after clicking Terminate.
- On the Emulator, press the End key.

After debugging, run your application again to check its functionality

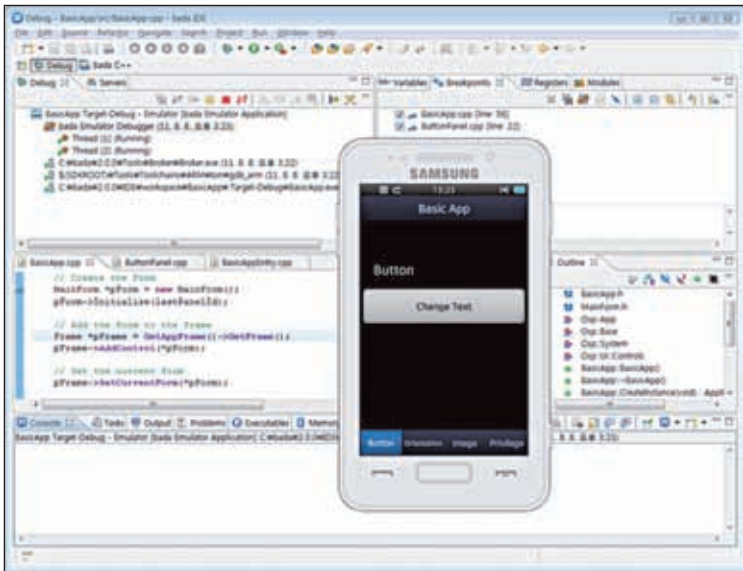

Debugging Environment

and to ensure that the bugs detected during the debugging process are fixed.

Running Web Applications on the Emulator

You can run bada Web applications on the Emulator using the Project Explorer or the bada IDE menu.

To run your application on the Emulator:

1. Start the run by doing one of the following:

- In the Project Explorer, right-click the project and select Run As >