


are used for identifying the items defined in the footer area of the device screen, and the ID_ORIENTATION value is meant for the `Osp::Ui::Controls::Button` instance we intend to make for the Orientation panel, to flip the device display between portrait and landscape modes.

The action IDs are used by the `OnActionPerformed()` event handler when determining the consequences of the user actions.

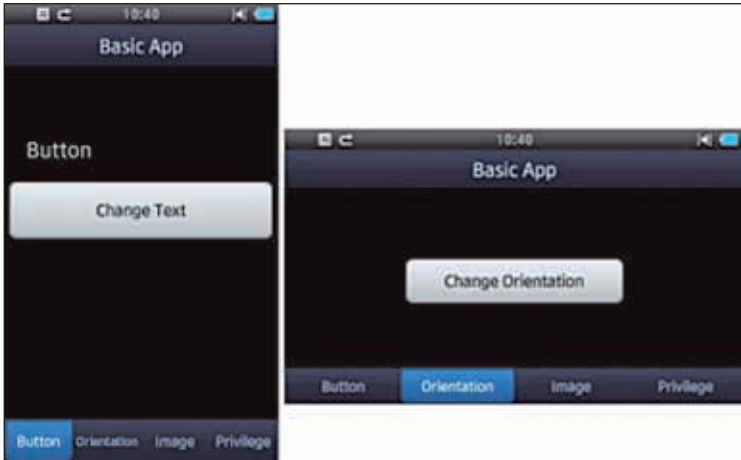

A basic app in landscape and portrait mode

The header file also declares the required event handlers for the `MainForm` class.

protected:

- `static const int ID_FOOTER_ITEM1 = 101;`
- `static const int ID_FOOTER_ITEM2 = 102;`
- `static const int ID_FOOTER_ITEM3 = 103;`
- `static const int ID_FOOTER_ITEM4 = 104;`
- `static const int ID_ORIENTATION = 200;`
- `int __panelId;`
- `Osp::Ui::Controls::Panel* __pPanel[4];`
- `Osp::Ui::Controls::Button* __pButtonOrientation;`

public:

- `virtual result OnInitializing(void);`
- `virtual result OnTerminating(void);`
- `virtual void OnActionPerformed(const Osp::Ui::Control& source, int actionId);`