

- }
- Panels


Initialise the application

The orientation modes for the panels are set globally to portrait and landscape, since no other modes are supported.

The `define()` method of the `Osp.`

`Core.Mixin` class is used to define the `BasicAppAllPanels` mixin with a specific configuration. The members key is used to declare the action IDs for panel buttons, the orientation index, and the label and button text size.

```
• orientationModes = ["por-
trait", "landscape"];
• Osp.Core.Mixin.
define("BasicAppAllPanels",
• {
•   members:
•   {
•     ACTION_ID:
•     {
•       BUTTON_PANEL: 1,
•       ORIENTATION_PANEL: 2,
•       PRIVILEGE_TEST_1: 3,
•       PRIVILEGE_TEST_2: 4,
•     },
•
•     orientationModeIndex: 0,
•     LABEL_TEXTSIZE: 25,
•     BUTTON_TEXTSIZE: 25,
•
•     // Member methods are defined here
•   }
• });
```

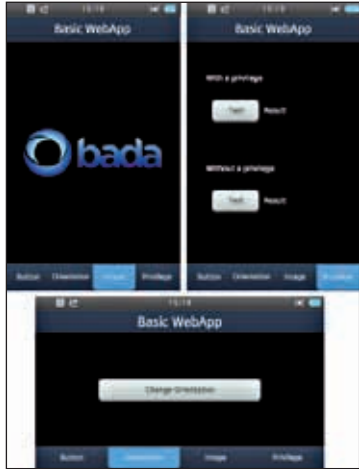

BasicWebApp panels

Create the Button panel

The Button screen demonstrates the use of the `Osp.Ui.Controls.Button` and `Osp.Ui.Controls.Label` controls.

The `createBodyButtonPanel()` method is used to create the button-