


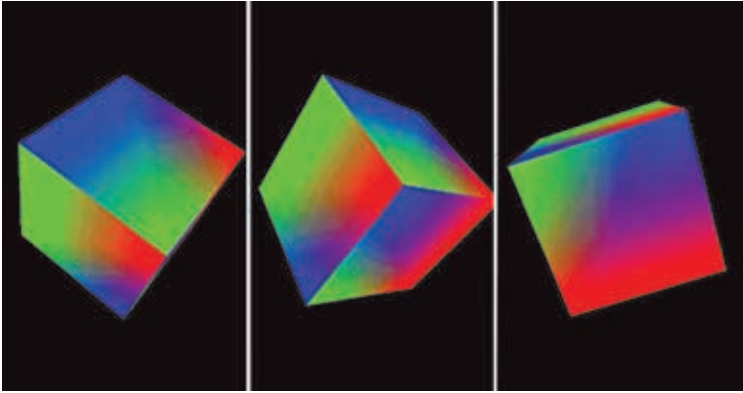

GlesCube form

This application requires two libraries - FGraphicsEgl and FGraphicsOpengl - for using the required functions of OpenGL® and EGL™. These libraries can be added from **Project > Properties > C/C++ Build > Settings > Tool Settings > bada C++ Linker** in the bada IDE.

Initialise the application

1. GlesCube.h Header File

- a. The GlesCube.h header file includes the FGraphicsOpengl2.h file to use the definitions and functions of OpenGL® ES 2.0 in the application.

A 2D array is declared within a structure for ease of use and for reuse in the application.

```
• #include <FBase.h>
• #include <FSystem.h>
• #include <FGraphics.h>
• #include <FUi.h>
• #include <FApp.h>
• #include <FGraphicsOpengl2.h>
•
• struct Matrix
• {
•     Osp::Graphics::Opengl::GLfloat m[4][4];
• };
```

- b. The **Osp::System::IScreenEventListener** interface is declared in this application for saving battery life by allowing the device to