



R.I.P. Red Hydrogen Project

The Red Hydrogen Phones have been retired with the impending retirement of the founder, Jim Jannard. <https://dgit.in/nov19-49>



Xiaomi on top

Xiaomi leads in the Indian smartphone market in Q3 with 26% share, with Samsung trailing behind at 20%. <https://dgit.in/nov19-50>

EXAMPLE: BUILDING A LOAD BALANCER


Let's build a simple Load Balancer in Ballerina which can take a request and generate a load balancer, which in turn balances the same request over multiple endpoints. To begin with, we'll create an endpoint on port 8080 for our backend which can be done with the following code.

```
import ballerina/http;
import ballerina/log;
listener http:Listener
backendEP = new(8080);
```

Then we are going to define the load balancing client endpoints to call the backend services and indicate which HTTP clients will need to be balanced.

```
http:LoadBalanceClient lbBack-
endEP = new({
    targets: [
        { url:
            "http://localhost:8080/mock1"
        },
        { url:
            "http://localhost:8080/mock2"
        },
        { url:
            "http://localhost:8080/mock3"
        }
    ],
    timeoutMillis: 5000
});
```

We now have three services which are being load balanced and we have

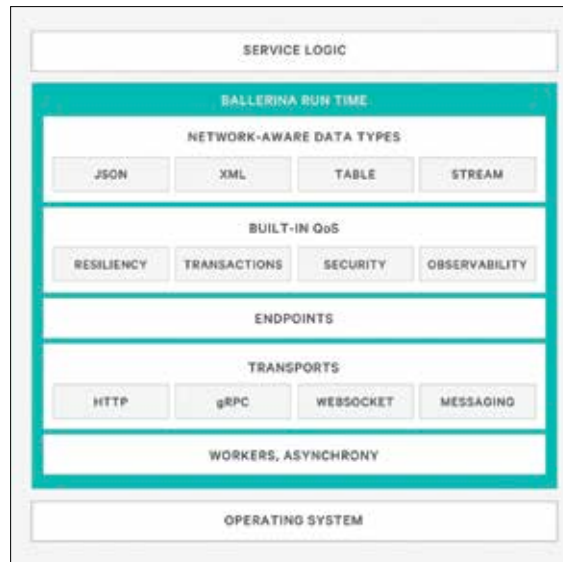

Networking data types make it easier to write microservices

also specified a timeout value of 5000 milliseconds. Next step would be to create an HTTP service that is attached to this endpoint and create a REST resource within the API.

```
@http:ServiceConfig {
    basePath: "/lb"
}
service loadBalancerDemoSer-
vice on new http:Listener
(9090) {
    @http:ResourceConfig {
        path: "/"
    }
}
```

Now, we can move on to implement- ing a caller endpoint reference as well as the data object to request with.

```
@http:ResourceConfig
{
    path: "/"
}
resource function
roundRobin(http:Caller
caller, http:Request req)
{
    json request-
Payload = { "name": "Bal-
lerina" };
    var response
= lbBackendEP->post("/",
requestPayload);
```

Then, we write the error- handling logic router. Should we obtain a valid response, then the process will run as expected but should we not get a valid response, the following logic

will be invoked.

```
if (response is
http:Response) {
    var re-
sponseToCaller = caller-
>respond(response);
    if (response-
ToCaller is error) {
        log:printError("Error sending
response",
err = responseToCall-
er);
    }
} else {
    http:Response
outResponse = new;
outResponse.
```

*DEV NEWS




*React concurrent mode

New mode helps React apps stay responsive and adjust to user device's capabilities and network speed. <https://dgit.in/devnov19-4>



*Story of SSH Port 22

Everyone who has used SSH knows that the default port is 22, here's how it came to be so. <https://dgit.in/devnov19-5>

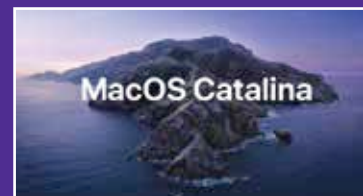

*Buggy Catalina

A brief overview of why iOS 13 and macOS 10.15 Catalina have been unusually buggy releases from Apple. <https://dgit.in/devnov19-6>