

Twitch source code leaked!


125GB of source code and other confidential documents of twitch.tv were leaked on 4chan. <https://dgit.in/nov21-21>



The "Antimicrobial" 2 in 1?

Acer released a new "antimicrobial" 2 in 1 laptop which is supposed to destroy germs. <https://dgit.in/nov21-22>

13. Now, both Dropdown 1 and Dropdown 2 are dependent, and the results of Dropdown 2 will depend on the choice made in Dropdown 1.

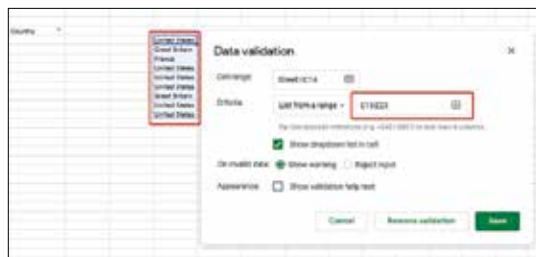

Create a Data validation from the result of the INDIRECT function

USE LAMBDA FUNCTION IN EXCEL TO CREATE REUSABLE FORMULAE

Often, we find ourselves copy-pasting or reusing formulae across the sheet. While it is possible to apply a formula to a cell and have it replicated along the desired cells, this process can become inefficient while proofreading the sheet and formulae for errors. This is where LAMBDA functions come in handy.

A LAMBDA function is a user-defined function that can be called whenever needed and proofread easily. LAMBDA also allows users to define their own formulae without having to worry about making Excel a potential programming language of its own.

Note that using LAMBDA function requires you to be part of the Office Insiders program at least in the Current Channel (Insider Slow) ring. The function will roll out to general users later.

A LAMBDA function follows the syntax,
`=LAMBDA([parameter1, parameter2,...] calculation). "Parameter", here, refers to the cell number or string while "calculation" is the formula you want to use with these cell numbers.`

1. For this example, let's consider that we want to calculate the hypotenuse of a right-angle triangle from lengths of two sides.
2. Go to the Formulas menu and click on Name Manager in the Defined Names section or simply press **Ctrl+F3**. In the dialogue box that appears, click on New...
3. This will open a dialogue box where

you can define what the LAMBDA function would be. In the Name box, type an easily identifiable name. This name will act as a formula and will be visible in the formula suggestions as well. Let's call this HYPOT.

In Scope, select the workbook this formula applies to (if there are multiple sheets in the same file). The Comment box allows you to type any comment that will be useful for later identification or proof-reading the formula.

Finally, in the Refers to section, input the LAMBDA formula you need. Let's use a function to easily calculate the hypotenuse. The formula we will be using is `=LAMBDA(a, b, SQRT((a^2+b^2)))`. Click Ok to save the new LAMBDA function with the name HYPOT.

4. Let's use our custom formula in the sheet. In the C1 cell, type `=HYPOT(A1,B1)`. You will see that it has calculated the hypotenuse. Drag this formula to the other cells to calculate the other hypotenuse values as well.
5. As you can see, it is much easier to simply reuse this HYPOT formula across the sheet instead of having to use the actual calculation every time or dabble in Visual Basic programming. This ensures good reproducibility and integrity of data without errors and makes it easy for someone to proofread the calculation. Any changes thus made will automatically reflect across the workbook wherever this new formula has been used.
6. This is a highly simplified example to illustrate the utility of a LAMBDA function. There is practically no limit to the complexity of the formulae that can be used with this nifty tool.

USE THE UNIQUE FUNCTION TO QUICKLY FIND UNIQUE VALUES IN A SHEET

If you are an Office 365 subscriber, you have access to the Dynamic Arrays

family of functions of which UNIQUE is a very useful one. As the name suggests, the UNIQUE function can return a list of unique values in each list or range.

The UNIQUE function has a simple syntax, `=UNIQUE(array, [by_col], [exactly_once])`. The array is the most important part of the function while the `by_col` and `exactly_once` are True or False arguments and are used only if required.

1. Let's use the UNIQUE function to return unique values in a column that do not repeat. In this example, we have a few names that have been repeated more than once.
2. In a new cell, let's use the formula, `=UNIQUE(B2:B10)`.
3. As you can see, the UNIQUE function has removed all duplicate names from the list and returned only unique ones. Since UNIQUE is part of the Dynamic Arrays family, the results are applied to the neighboring blank cells too. What this means is that when you use the neighboring cells, the array is automatically selected instead of you having to manually specify the data array each time.
4. Now, let's apply the `exactly_once` argument. Change the formula to `=UNIQUE(B2:B10),TRUE)`. We see that names that are repeated more than once are now excluded and only highly unique names are displayed.
5. If we use FALSE instead of TRUE in the `exactly_once` argument, the result will be like Step 2. The exact use of FALSE depends on your data.
6. It is also possible to concatenate columns and apply the UNIQUE function. To do so, we will change the formula in our example to `=UNIQUE(B2:B10&" "&C2:C10, TRUE)`. What this basically does is that it concatenates First Name and Last Name from B and C columns and displays only those that are highly unique.
7. This way, it is possible to combine UNIQUE with several other functions and filter out data easily.