

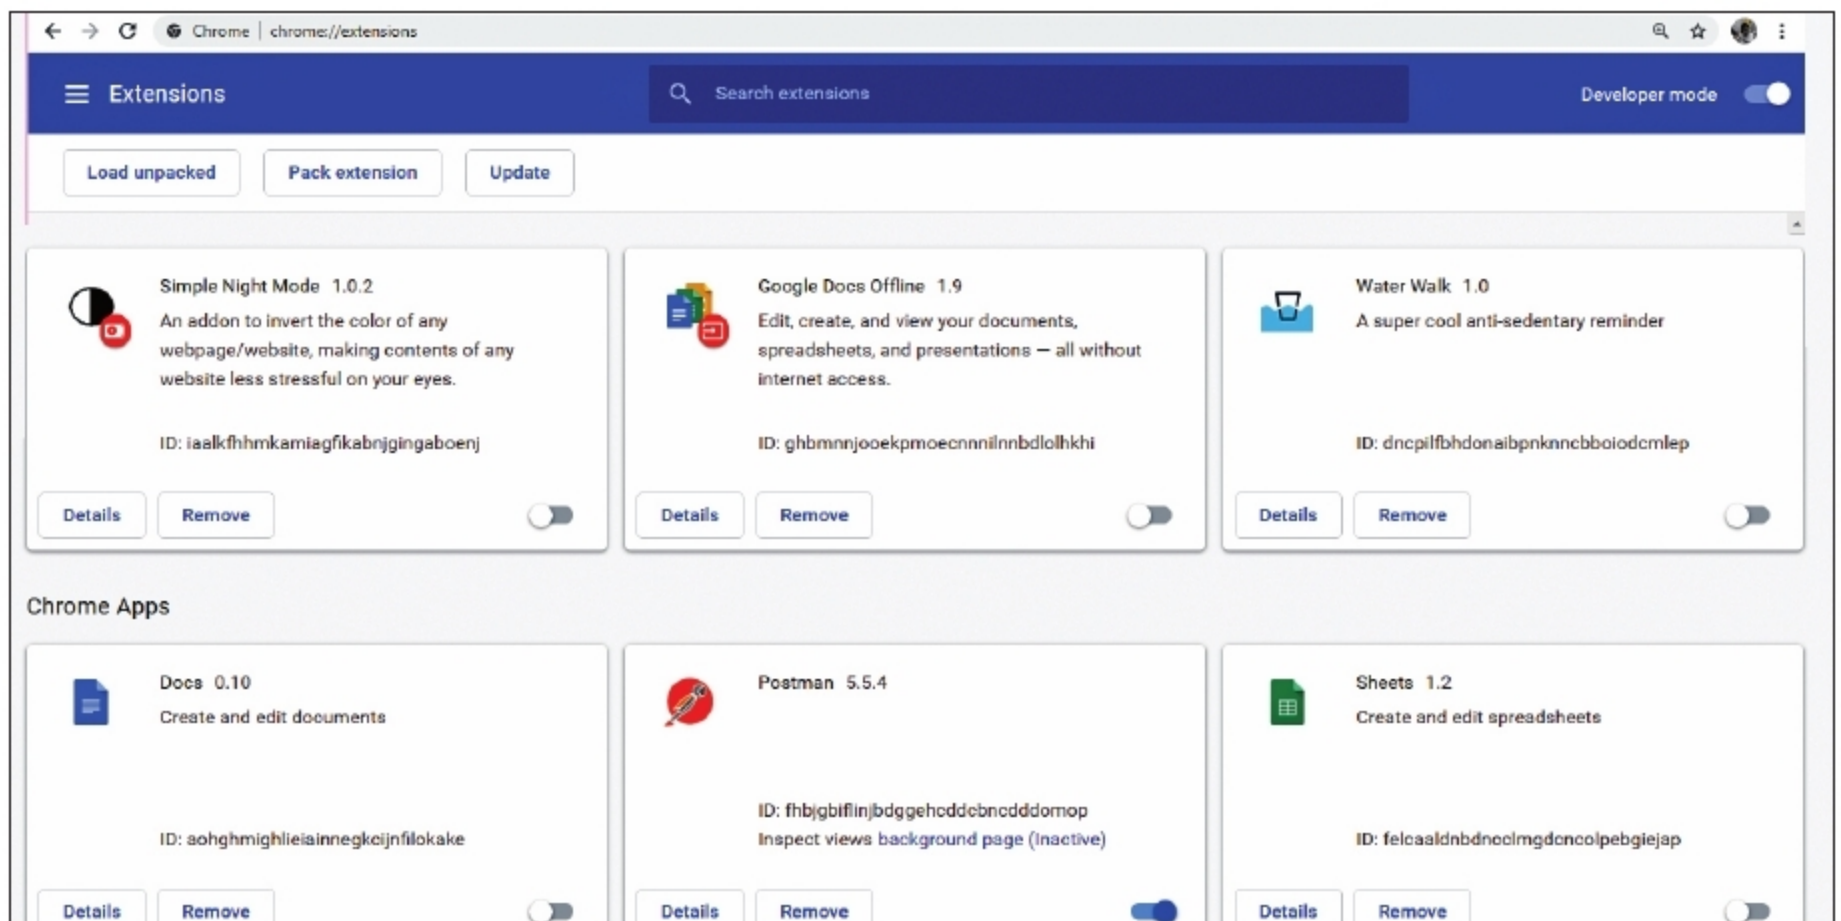


Figure 3: Extension loader interface to load/unload extensions

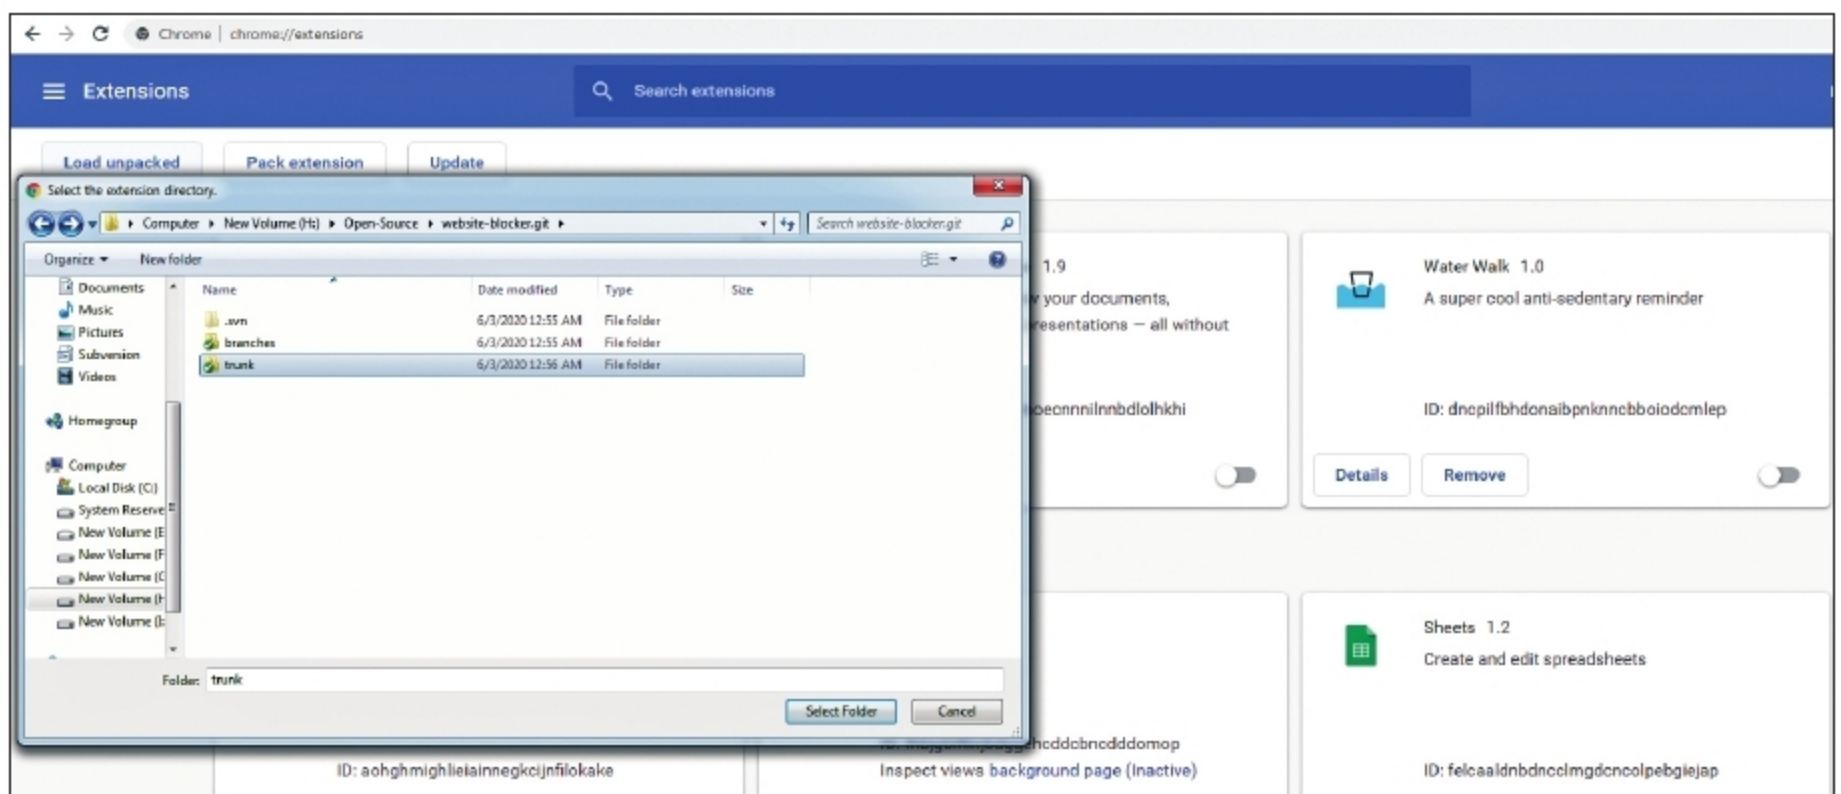


Figure 4: Folder selection dialogue box to select our extension

`webRequest.onBeforeRequest` API and check if it matches the list of websites that we have stored. If it does, we block the request; else, we allow it.

Loading the extension

First, let us load the extension in the Chrome browser.

1. Open up the Chrome menu by clicking the icon that's to the right of the address bar and select *Extensions* under the *Tools* menu or just enter `chrome://extensions` in the address bar before hitting *Enter*, as shown in Figure 3.
2. Check the *Developer mode* checkbox in the top right-hand

corner, if it hasn't been checked.

3. Now, click on *Load unpacked*, which will open up the *file-selection* dialogue box, as shown in Figure 4.
4. Navigate to the directory where your extension files are and select it. Another easy way is to simply drag and drop the extension folder onto `chrome://extensions` in your browser to load it. The extension will install/load right away. If you make some errors while creating the extension, it will not load and will display an error message at the top of the page. You have to rectify the error and then try again.