

The setup for this article is very simplistic — it consists of one client and one server. In this example, the server hosts all the components — the file, storage, database and director. Though simplistic, the setup serves the purpose of getting Bacula up and running with minimum effort.

Installing the Bacula server

Let us configure the Bacula server on an Ubuntu 18.04 server. To do so, issue the following command:

```
sudo apt install bacula
```

The *apt* process will ask whether you want to install the Bacula server package and any other necessary requirements. Go ahead and answer 'Yes' to that. This should start the downloading, installation and configuration process for the Bacula server and any packages it relies on.

During the installation process you'll be asked several configuration questions, starting with the setup of Postfix. (This is Wietse Venema's mail server that started life at IBM Research as an alternative to the widely-used Sendmail program. It attempts to be fast, easy to administer and secure.) Postfix is the package that you can configure to send you email updates.

Select the Internet site and press 'Okay'.

For the mail name, we'll just use the hostname. Bacula works with both Postgres and MySQL. I have chosen Postgres as it was already installed on my system.

Now that we have all the packages installed for the server, we'll move to the client and install the *bacula-client* package.

Installing Bacula on the client

To install Bacula on the client, use the following command:

```
sudo apt install bacula-client
```

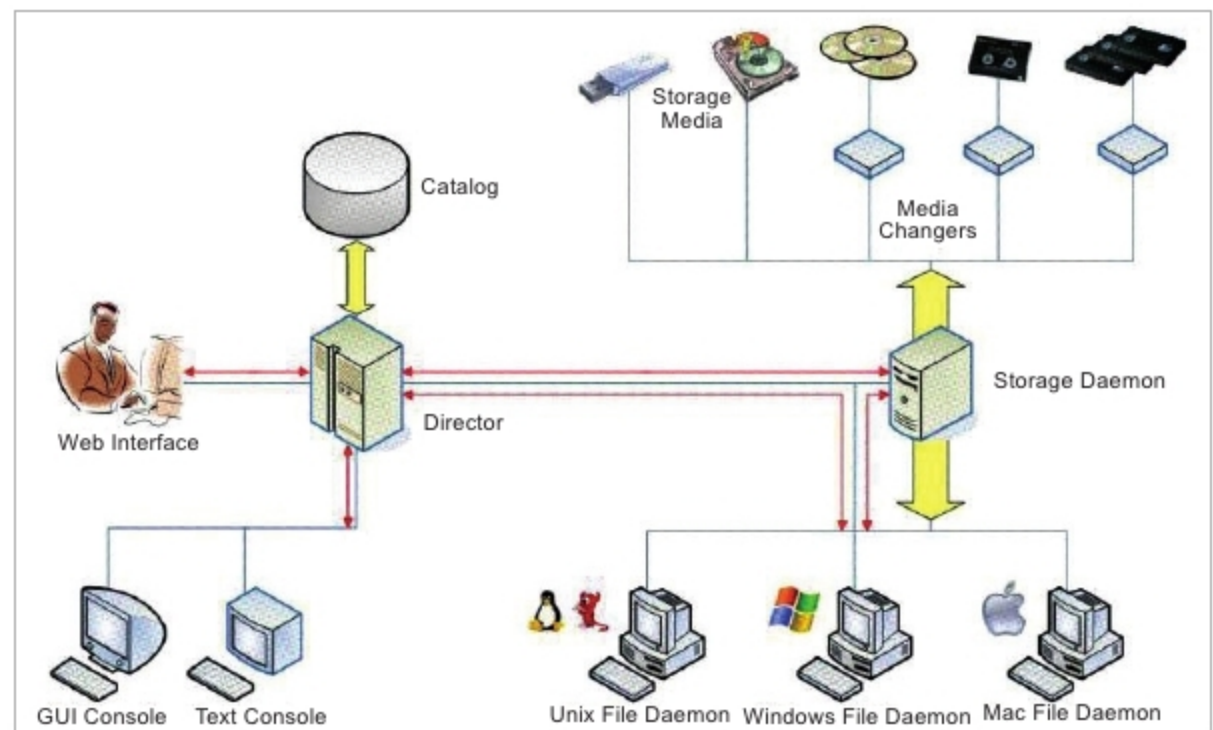


Figure 1: Bacula's components

Postfix Configuration

Please select the mail server configuration type that best meets your needs.

No configuration:
Should be chosen to leave the current configuration unchanged.

Internet site:
Mail is sent and received directly using SMTP.

Internet with smarthost:
Mail is received directly using SMTP or by running a utility such as fetchmail. Outgoing mail is sent using a smarthost.

Satellite system:
All mail is sent to another machine, called a 'smarthost', for delivery.

Local only:
The only delivered mail is the mail for local users. There is no network.

General type of mail configuration:

No configuration
☒ Internet Site
 Internet with smarthost
 Satellite system
 Local only

<Ok> <Cancel>

Figure 2: Postfix configuration

Postfix Configuration

The "mail name" is the domain name used to "qualify" ALL mail addresses without a domain name. This includes mail to and from <root>: please do not make your machine send out mail from root@example.org unless root@example.org has told you to.

This name will also be used by other programs. It should be the single, fully qualified domain name (FQDN).

Thus, if a mail address on the local host is foo@example.org, the correct value for this option would be example.org.

System mail name:

bacula_server

<Ok> <Cancel>

Figure 3: The next step in the Postfix configuration

Confirm that you want to install the client package and then wait until all the packages have been

downloaded and installed. Once done, ensure that you have all the configuration files in */etc/bacula*. Inside that directory, you should see