

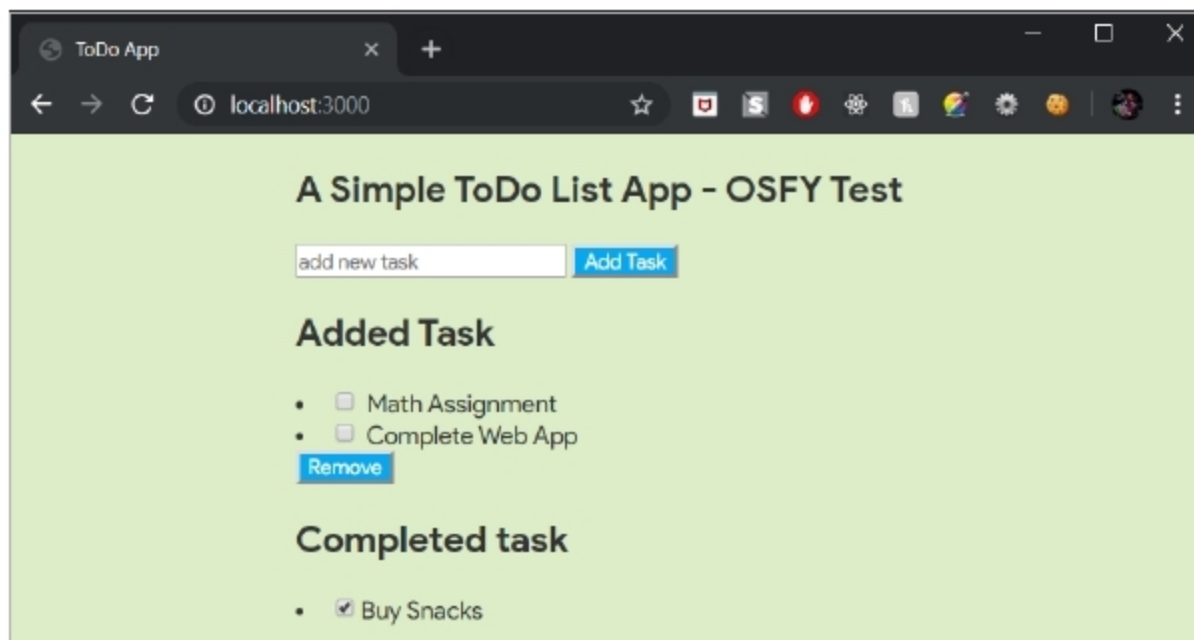


Figure 8: App with added CSS

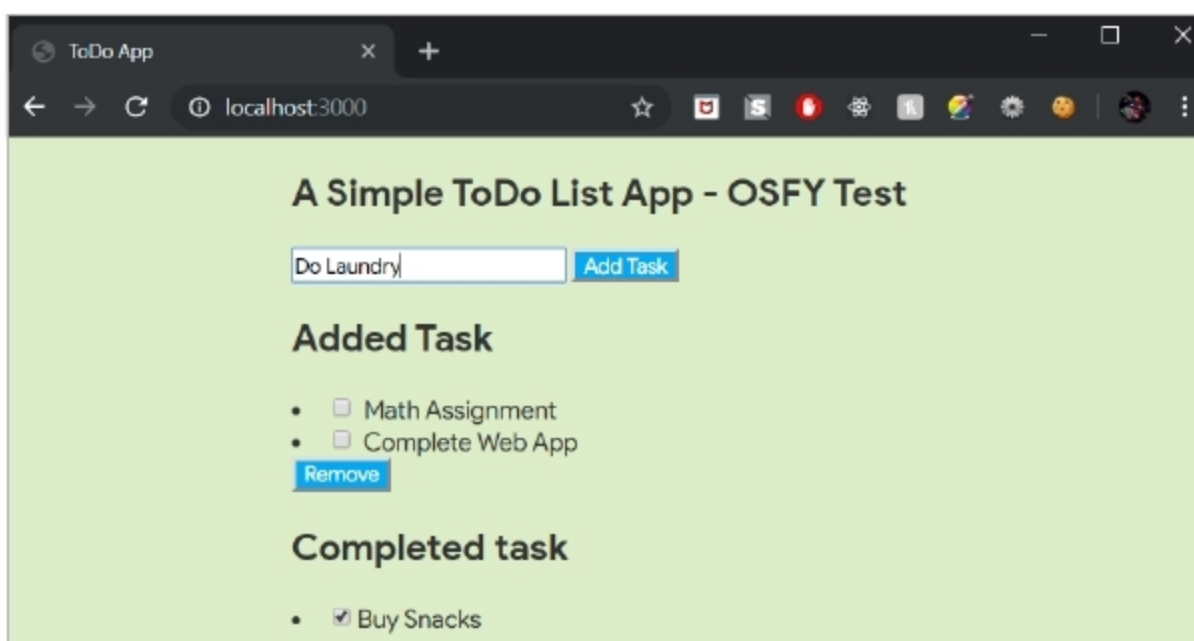


Figure 9: Adding a sample task

```
button:hover{
  box-shadow: 0 12px 16px 0
    rgba(0,0,0,0.24), 0 17px 50px 0
    rgba(0,0,0,0.19);
}
```

On running the app, it should look somewhat like what's shown in Figure 8.

Finally, our files should look something like what's shown below. The *index.js* file should look like:

```
//dependencies required for the app
var express = require("express");
var bodyParser = require("body-
  parser");
var app = express();

app.use(bodyParser.urlencoded({
```

```
extended: true }));
app.set("view engine", "ejs");
//render css files
app.use(express.static("public"));

//placeholders for added task
var task = ["Math Assignment",
  "Complete Web App"];

//placeholders for removed task
var complete = ["Buy Snacks"];

//post route for adding new task
app.post("/addtask", function(req, res)
{
  var newTask = req.body.newtask;
  //add the new task from the post
  route
  task.push(newTask);
  res.redirect("/");
});
```

```
app.post("/removetask", function(req,
  res) {
  var completeTask = req.body.check;
  //check for the "typeof" the
  different completed task, then add into
  the complete task
  if (typeof completeTask ===
    "string") {
    complete.push(completeTask);
    //check if the completed task
    already exists in the task when checked,
    then remove it
    task.splice(task.
      indexOf(completeTask), 1);
  } else if (typeof completeTask ===
    "object") {
    for (var i = 0; i <
      completeTask.length; i++) {
      complete.
        push(completeTask[i]);
      task.splice(task.
        indexOf(completeTask[i]), 1);
    }
    res.redirect("/");
  }
});
```

```
//render the ejs and display added
task, completed task
app.get("/", function(req, res) {
  res.render("index", { task: task,
    complete: complete });
});

//set app to listen on port 3000
app.listen(3000, function() {
  console.log("OSFY Test App Server
    is running on port 3000!");
});
```

And the *views/index.ejs* file should look like:

```
<html>
<head>
<title> ToDo App </title>
<link href="https://fonts.
  googleapis.com/css?family=Lato:100"
  rel="stylesheet">
<link href="/styles.css"
  rel="stylesheet">
</head>
```