

```
<body>
<div class="container">
<h2> A Simple ToDo List App - OSFY
Test</h2>
<form action="/addtask" method="POST">
<input type="text" name="newtask"
placeholder="add new task">
<button> Add Task </button>
<h2> Added Task </h2>
<% for( var i = 0; i < task.length; i++)
{ %>
    <li><input type="checkbox"
name="check" value="<%= task[i] %>" />
<%= task[i] %> </li>
<% } %>
<button formaction="/removetask"
type="submit" id="top"> Remove </button>
</form>

<h2> Completed task </h2>
<% for(var i = 0; i < complete.length;
i++){ %>
    <li><input
type="checkbox" checked=<%= complete[i]
%> </li>
<% } %>

</div>
</body>
</html>
```

To add a task, fill the text box with the contents and click the button 'Add Task'.

Once the button is pressed, you can see the task added to the list.

In order to remove a completed task, check the item first and press *Remove*.

Once you press *Remove*, the corresponding events/tasks will be pushed to the *Completed task* section of the app.

Node.js may be a bad choice when it comes to tasks with heavy computation, since it might block the server's responsiveness. As stated, Node.js is single-threaded and uses only a single CPU core. It was never created to solve the compute scaling issue but to solve the I/O scaling problem, which it does really well.

Do try to build something with Node.js, and share the results with me. **END** 🐧

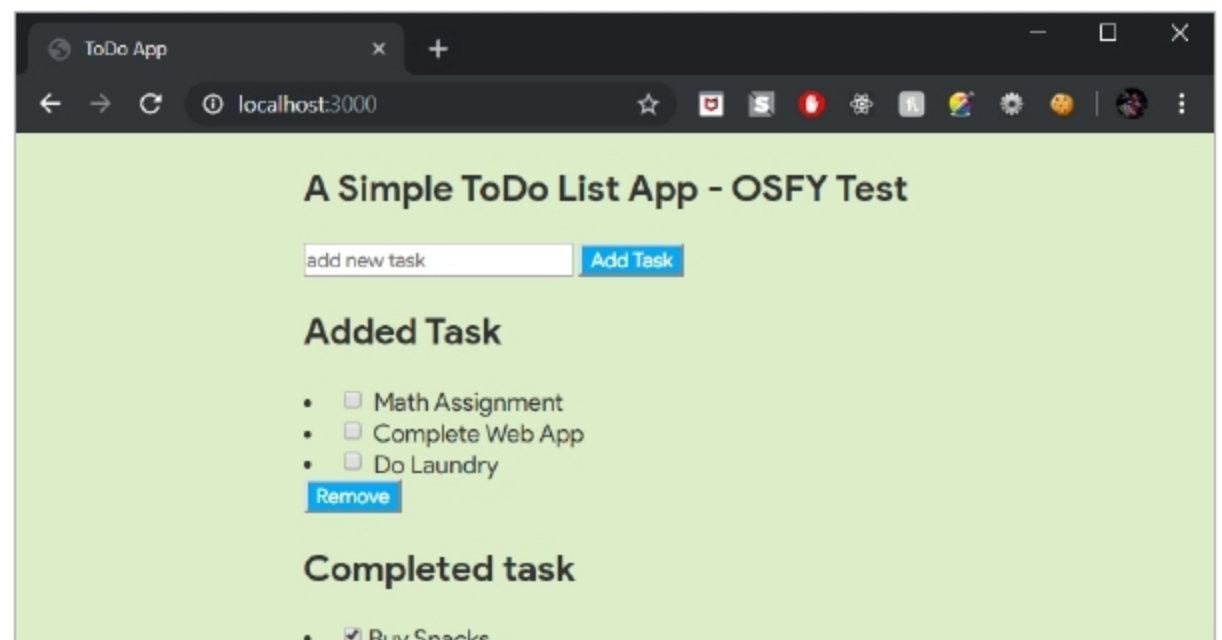


Figure 10: Task appended to the to-do list

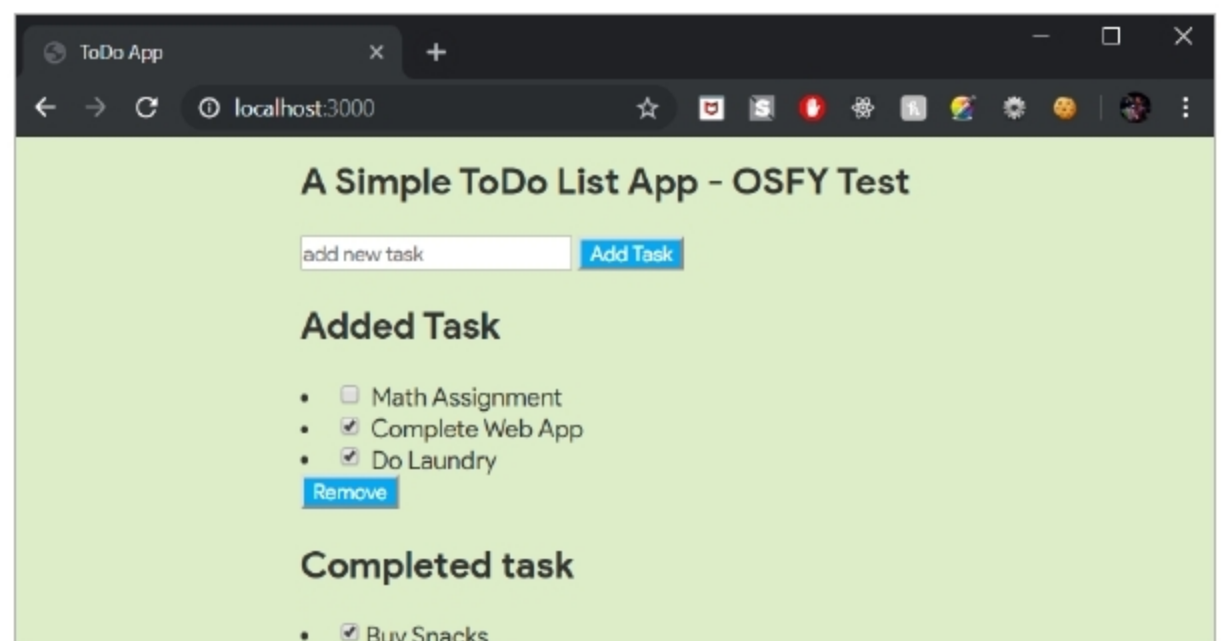


Figure 11: Checkbox to remove a completed task

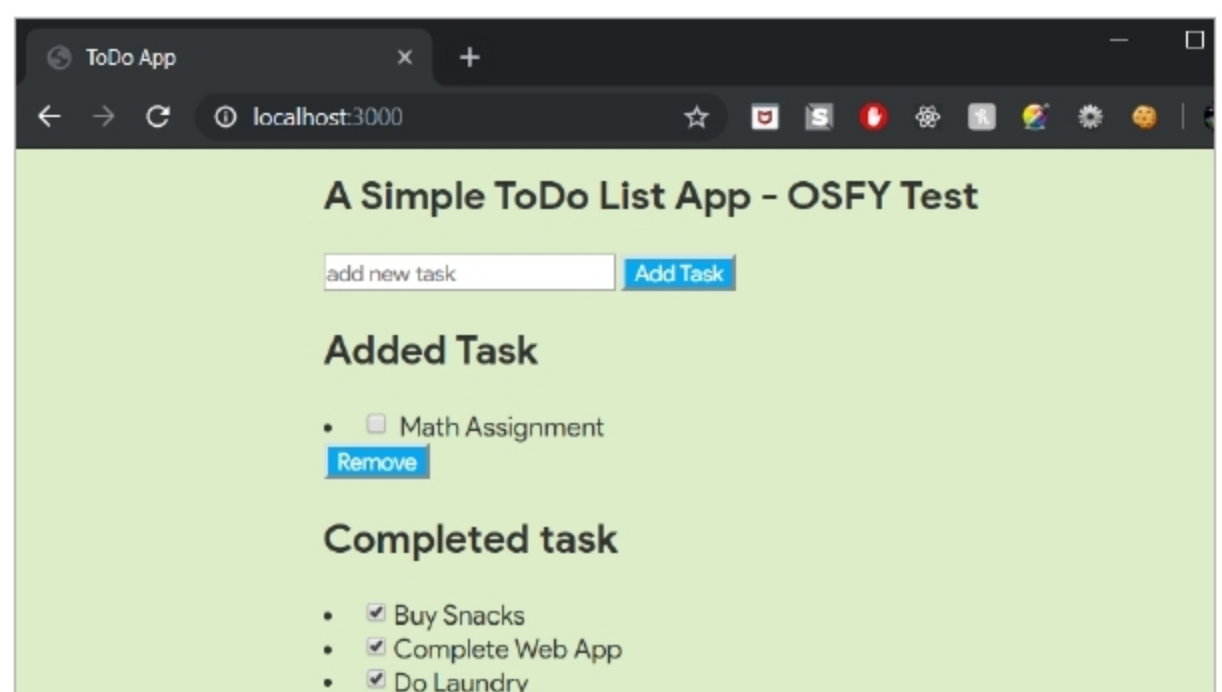


Figure 12: Completed tasks

By: Akhil Surendran

The author is an open source enthusiast.