

window, which provides many options but first asks you to choose the data set for preprocessing.

4. Click on the 'Open file' tab to select the data set. Weka provides frequently used data sets for experimental purposes. What has been selected here is the very commonly used Pima Indians Diabetes data set that contains 768 instances and nine attributes, where one of the attributes is a class label. These attributes predict whether the patient has diabetes or not.

right side window, with the time taken to build the model and other performance measures.

As shown in Figure 4, the experiment provides a confusion matrix along with the accuracy of the prediction model. Here, the algorithm gives 76.3 per cent correctly classified 'instances, while 23.69 per cent instances are incorrectly classified. Moreover, it gives the values of the TP (true positives) rate, FP (false positives) rate, precision, recall, F-measure and other parameters.

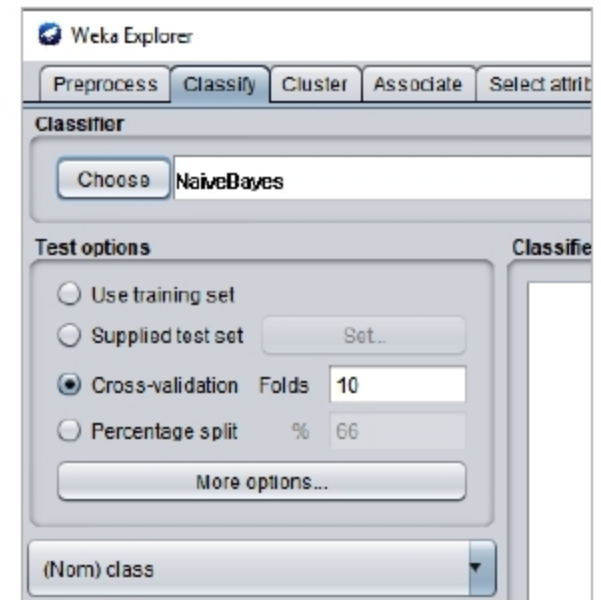


Figure 3: Selecting a classifier in Weka

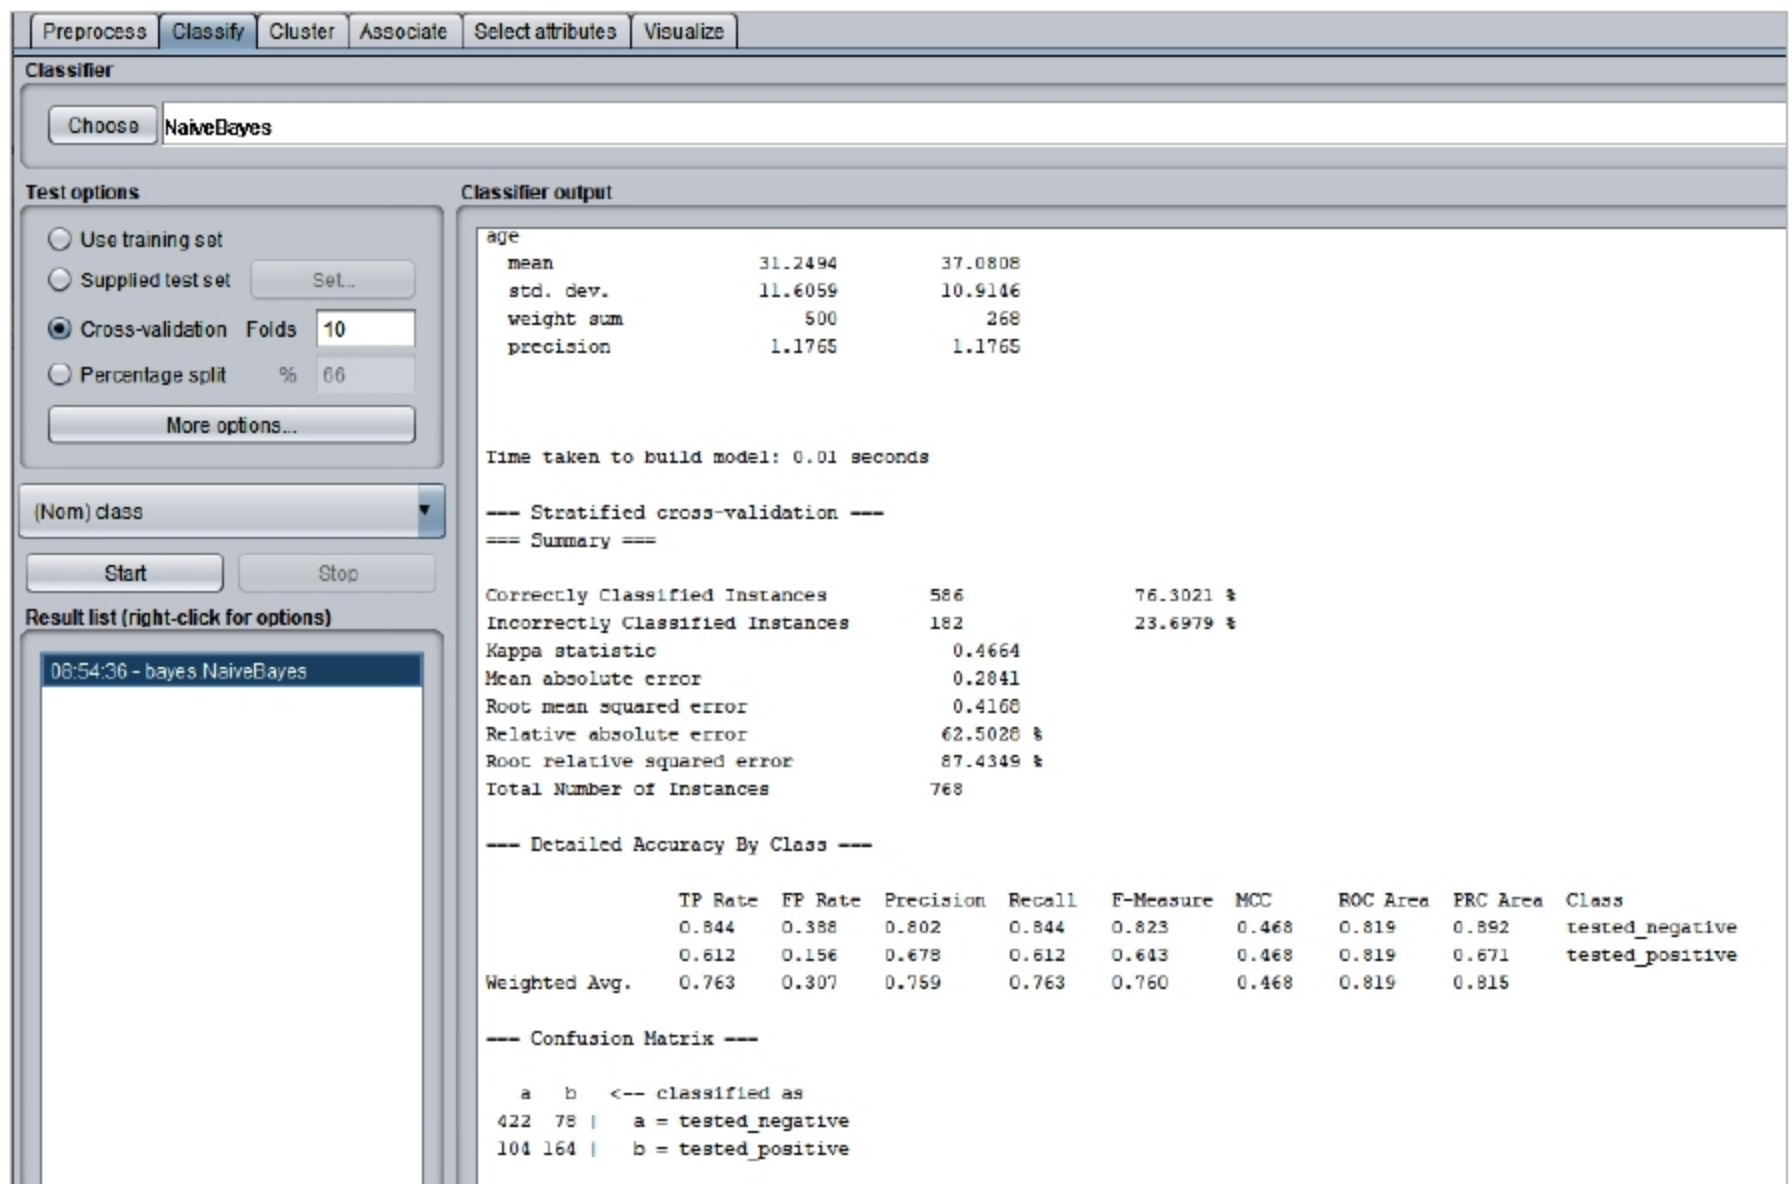


Figure 4: Results of the experiment

5. To start an experiment, click on the 'Classify' tab to open the available classifiers in Weka. Among the several different classifiers available, we have applied the 'NaiveBayes' classifier with the value of cross-validation folds set to 10.
6. Click on 'Start' and it shows the results of the experiment in the

The environment offered by Weka enables users to design, run and analyse different experiments based on machine learning algorithms. It offers both the GUI and command

line interface to run the experiments. We can also specify our own data set on which to perform different algorithms, in order to compare their performance. **END** 

By: Dr Sanskruti Patel and Dr Atul Patel

The authors are members of the faculty at the Department of Computer Science and Applications, Charotar University of Science and Technology, Changa, Gujarat.