

the user is, you can use Taiko to test this setup with ease.

First, we need to set permission to use geolocation for the specific website:

```
await overridePermissions('http://maps.google.com', ['geolocation']);
```

Now call the `setLocation` API with *lat*, *long* and *accuracy*:

```
await setLocation({ latitude: 27.1752868, longitude: 78.040009, accuracy: 20 });
```

DOM query

Another important API that Taiko provides is the `evaluate()` function, which lets you execute an arbitrary JavaScript function in the browser so that you can use built-in functions like `querySelector()` to manipulate the page.

For example, on the Google home page, the search input field has the name 'q'; so you can use the `evaluate()` function to target this input and set/change its value.

```
const { openBrowser, goto, evaluate, closeBrowser } = require('taiko');
(async () => {
```

```
Version: 1.0.3 (Chromium:79.0.3945.16)
Type .api for help and .exit to quit

> openBrowser()
✓ Browser opened
> goto('google.com')
✓ Navigated to URL http://google.com
> write('Taiko')
✓ Wrote Taiko into the focused element.
> press('Enter')
✓ Pressed the Enter key
> goBack()
✓ Performed clicking on browser back button
> .code
const { openBrowser, goto, write, press, goBack, closeBrowser } = require('taiko');
(async () => {
  try {
    await openBrowser();
    await goto('google.com');
    await write('Taiko');
    await press('Enter');
    await goBack();
  } catch (error) {
    console.error(error);
  } finally {
    await closeBrowser();
  }
})();
```

Figure 5: Taiko's REPL calling methods

```
try {
  await openBrowser();
  await goto('google.com');
  await evaluate(() => {
    document.querySelector('input[name="q"]').value = 'Gauge Taiko';
  });
} catch (error) {
  console.error(error);
}
```

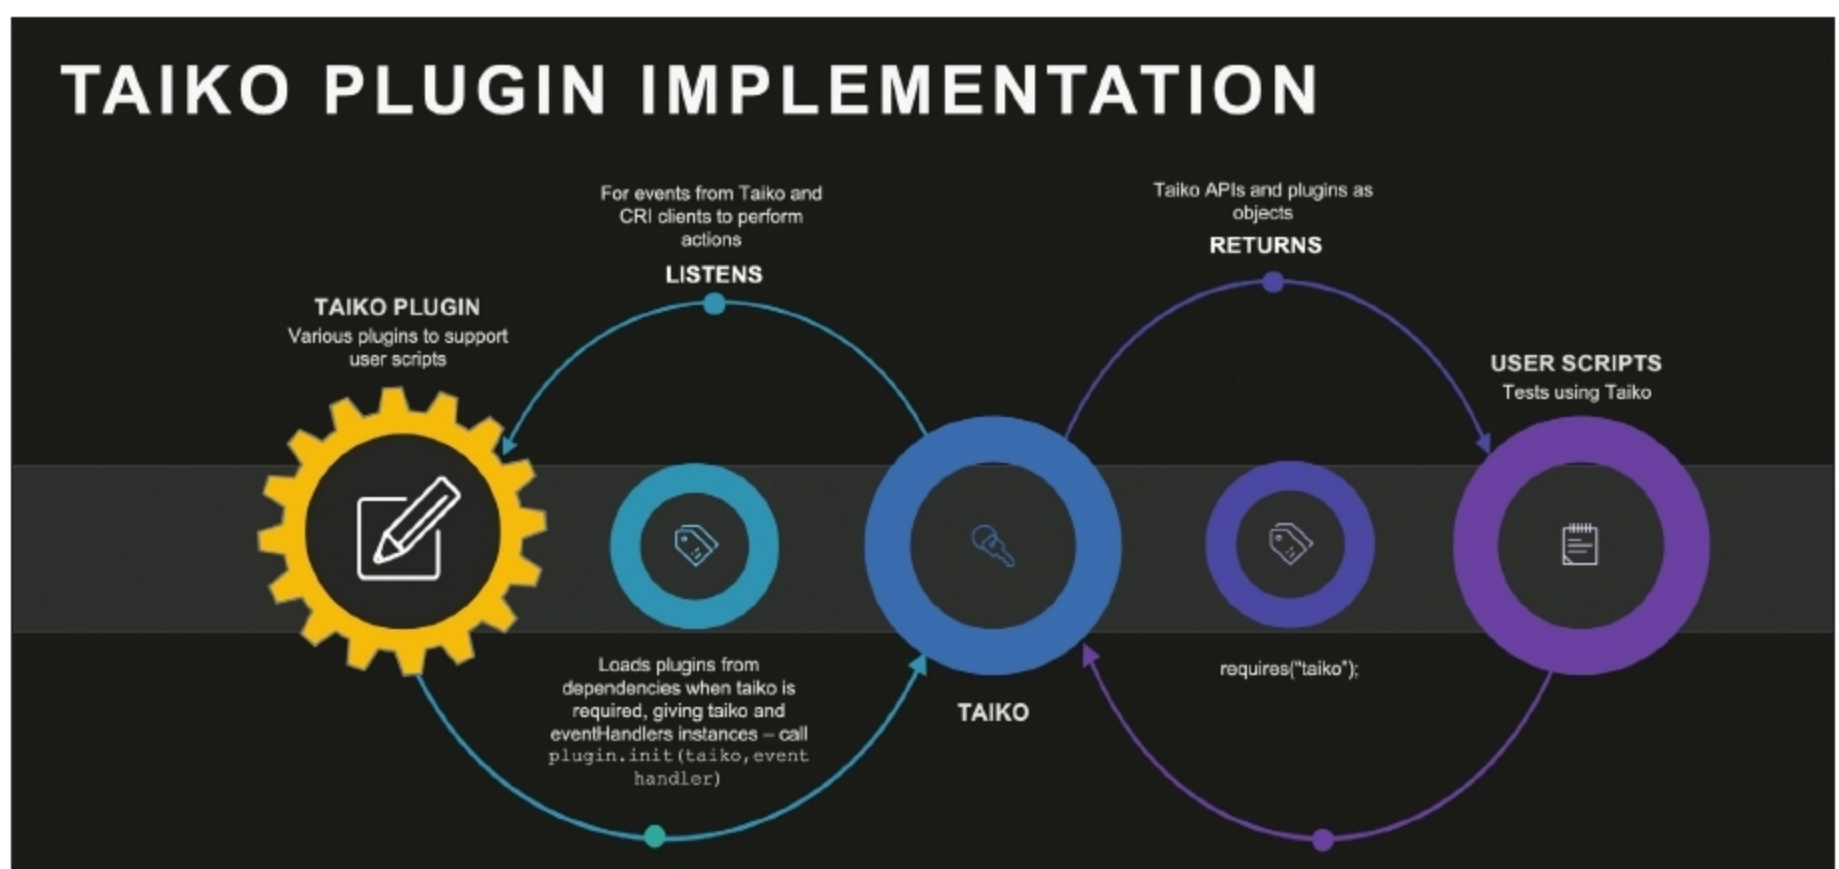


Figure 6: Taiko plugin implementation