

features of a collection of information, and includes the process of using and analysing those statistics.

To perform descriptive statistics, choose *Data -> Statistics -> Descriptive Statistics*.

Fill a table in the spreadsheet with the main statistical properties of the data set.

Data

Input range: This refers to the range of the data to analyse.

Results to: This refers to the top left cell of the range where the results will be displayed.

Grouped by: Selects whether the input data has a *columns* or *rows* layout.

The example and output are shown in Figure 2.

Analysis Of Variance (ANOVA)

ANOVA is the acronym for Analysis Of Variance. It is a collection of statistical models and their associated estimation procedures (such as the 'variation' among and between groups) used to analyse the differences among the group means in a sample.

To perform ANOVA, choose *Data > Statistics > Analysis of Variance (ANOVA)*.

Data

Input range: This refers to the range of the data to analyse.

Results to: This refers to the top left cell of the range where the results are displayed.

Grouped by: Selects whether the input data has a *columns* or *rows* layout.

Type: Selects if the analysis is for a single factor or for two-factor ANOVA.

Parameters

Alpha: This is the level of significance of the test.

Rows per sample: Defines how many rows a sample has.

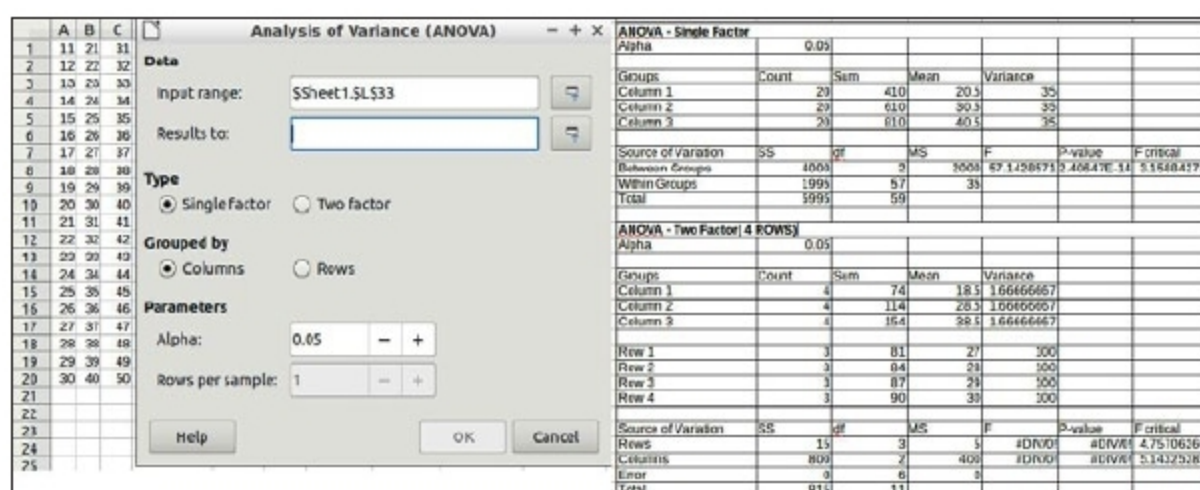


Figure 3: Data and options of ANOVA and the results

An example and results are shown in Figure 3.

Correlation

The correlation coefficient (a value between -1 and +1) refers to how strongly two variables are related to each other. You can use the *CORREL* function or the data statistics to find the correlation coefficient between two variables.

A correlation coefficient of +1 indicates a perfect positive correlation. A correlation coefficient of -1 indicates a perfect

negative correlation. To perform correlation, choose *Data > Statistics > Correlation*.

Data

Input range: This refers to the range of the data to analyse.

Results to: This refers to the top left cell of the range where the results will be displayed.

Grouped by: Selects whether the input data has a *columns* or *rows* layout.

An example and results are shown in Figure 4.

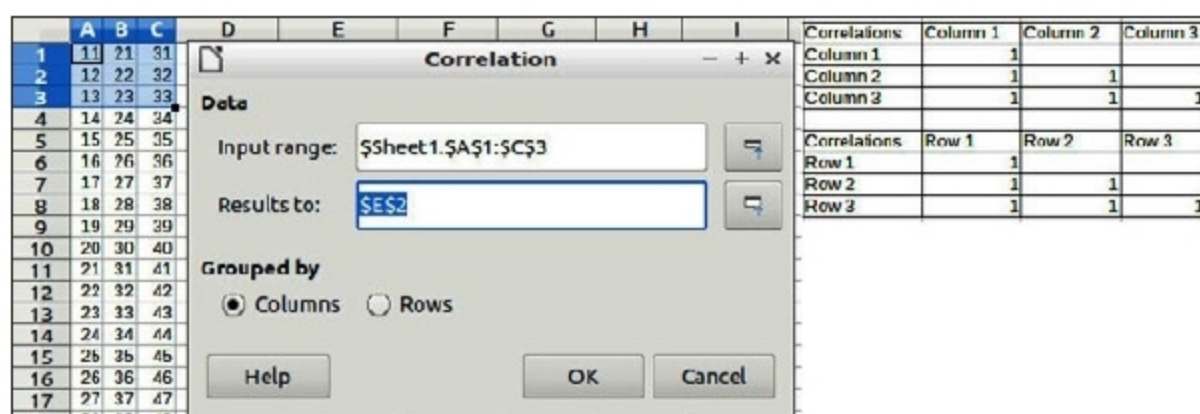


Figure 4: Sample data, correlation options and results

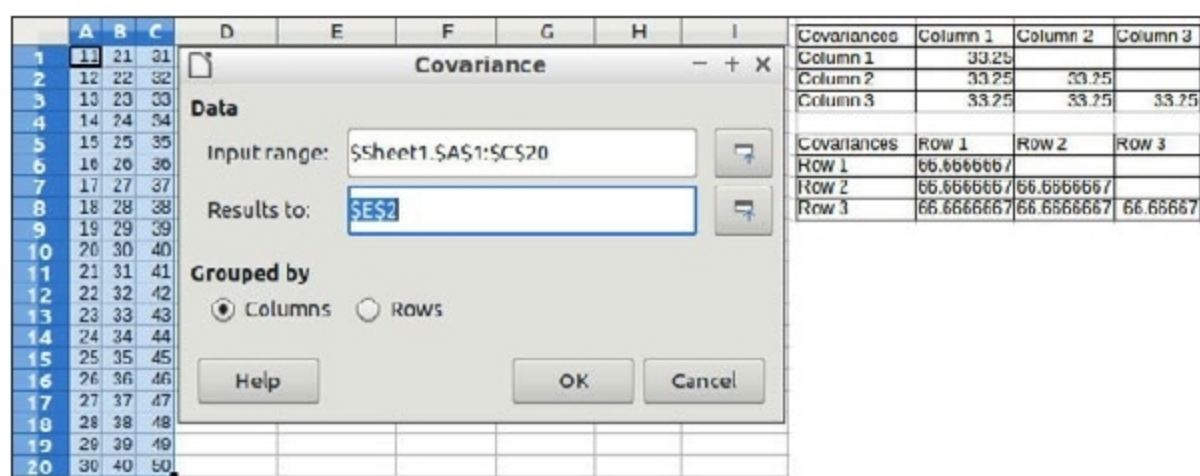


Figure 5: Sample data, covariance options and results