

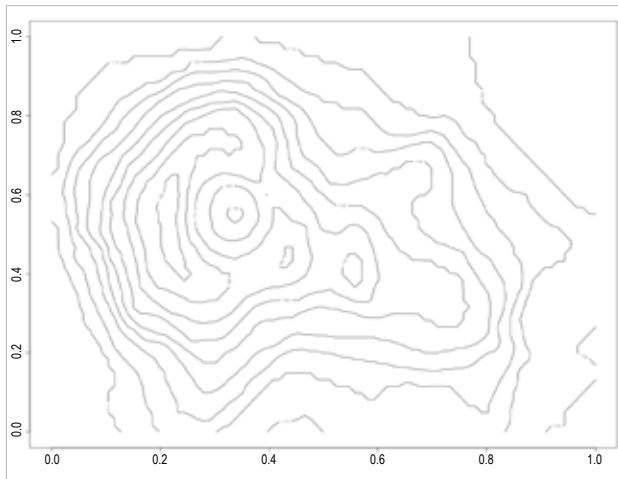


Figure 7: Volcano

The *qqline* function adds a theoretical line to a normal, quantile-quantile plot. The following arguments are accepted by these functions:

Argument	Description
x	The first data sample
y	The second data sample
datax	A logical value indicating if values should be on the x-axis
probs	A numerical vector representing probabilities
xlab	The label for x-axis
ylab	The label for y-axis
qtype	The type of quantile computation

Contour plot

The *contour* function is useful for plotting three-dimensional data. You can generate a new contour plot, or add contour lines to an existing chart. These are commonly used along with image charts. The volcano data set in R provides information on the Maunga Whau (Mt Eden) volcanic field, and the same can be visualised with the *contour* function as follows:

```
> contour(volcano)
```

The *contour* function accepts the following arguments:

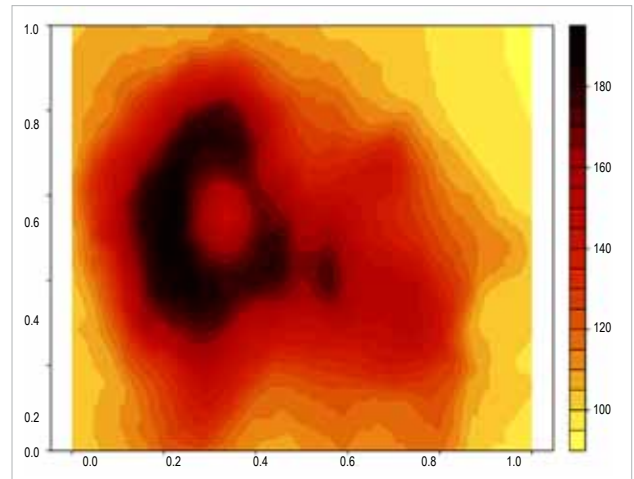


Figure 8: Filled volcano

Argument	Description
x,y	The location of the grid for z
z	A numeric vector to be plotted
nlevels	The number of contour levels
labels	A vector of labels for the contour lines
xlim	The x limits for the plot
ylim	The y limits for the plot
zlim	The z limits for the plot
axes	A value to indicate to print the axes
col	The colour for the contour lines
lty	The line type to draw
lwd	Width for the lines
vfont	The font for the labels

The areas between the contour lines can be filled using a solid colour to indicate the levels, as shown below:

```
> filled.contour(volcano, asp = 1)
```

The same volcano data set with the *filled.contour* colours is illustrated in Figure 8.

You are encouraged to explore the other functions and charts in the graphics package in R. **END** 🐧

By: Shakthi Kannan

The author is a free software enthusiast.