

Next, we need to configure the `.yaml` file, which is present in the `etc/filebeat/` folder:

```
sudo nano /etc/filebeat/filebeat.yaml
```

We need to configure only two things here. In the *Filebeat Input* section, change the type to *log* and uncomment the *enabled: false* and change it to *true*. We also need to specify the path of where the logs are stored, i.e., we need to specify `/opt/zeek/logs/current/*.log`

Once this is done, the first part of the settings should look similar to what's shown in Figure 1.

The second thing to be changed in the Elasticsearch output section is under *Outputs*. Uncomment the *output.elasticsearch* and *hosts*. Make sure the URL of the host and port number are similar to what you configured while installing ELK. We kept it as *localhost* with port number 9200.

In the same section, uncomment the user name and password at the bottom, and enter the user name and password of the elastic user that you generated while configuring ELK after installation. Once this is done, refer to Figure 2 and check the settings.

Configuring Zeek


Now that we have completed installing and configuring Filebeat, we need to configure Zeek so that it stores the logs in JSON format. For that, ensure your Zeek instance is stopped. If it's not, execute the command given below to stop it:

```
cd /opt/zeek/bin
./zeekctl stop
```

Now we need to add a small line in the *local.zeek*, which is present in the `opt/zeek/share/zeek/site/` directory.

Open the file as root and add the following line:

```
@load policy/tuning/json-logs.zeek
```

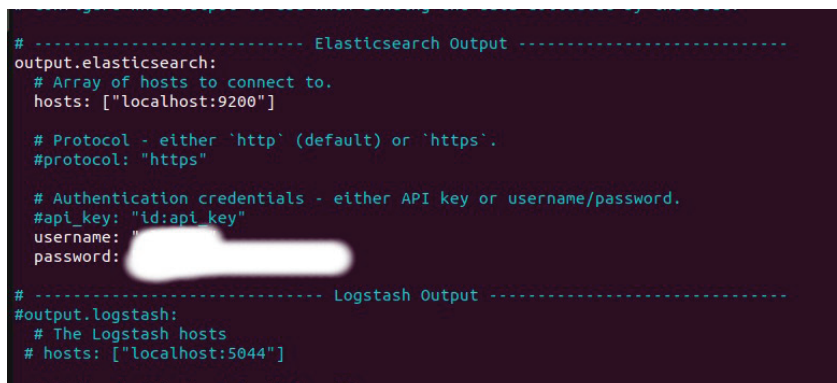

```
# ----- Elasticsearch Output -----
output.elasticsearch:
  # Array of hosts to connect to.
  hosts: ["localhost:9200"]


  # Protocol - either 'http' (default) or 'https'.
  #protocol: "https"

  # Authentication credentials - either API key or username/password.
  #api_key: "id:api key"
  username: " "
  password: " "

# ----- Logstash Output -----
output.logstash:
  # The Logstash hosts
  # hosts: ["localhost:5044"]

# Options for SSL. By default is off.
```

Figure 2: Filebeat config (b)

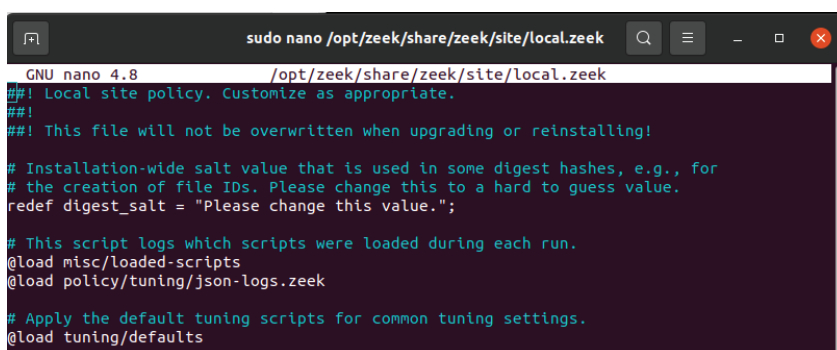


```
GNU nano 4.8 /opt/zeek/share/zeek/site/local.zeek
##! Local site policy. Customize as appropriate.
##!
##! This file will not be overwritten when upgrading or reinstalling!

# Installation-wide salt value that is used in some digest hashes, e.g., for
# the creation of file IDs. Please change this to a hard to guess value.
redef digest_salt = "Please change this value.";

# This script logs which scripts were loaded during each run.
@load misc/loaded-scripts
@load policy/tuning/json-logs.zeek

# Apply the default tuning scripts for common tuning settings.
@load tuning/defaults
```

Figure 3: *local.zeek* file

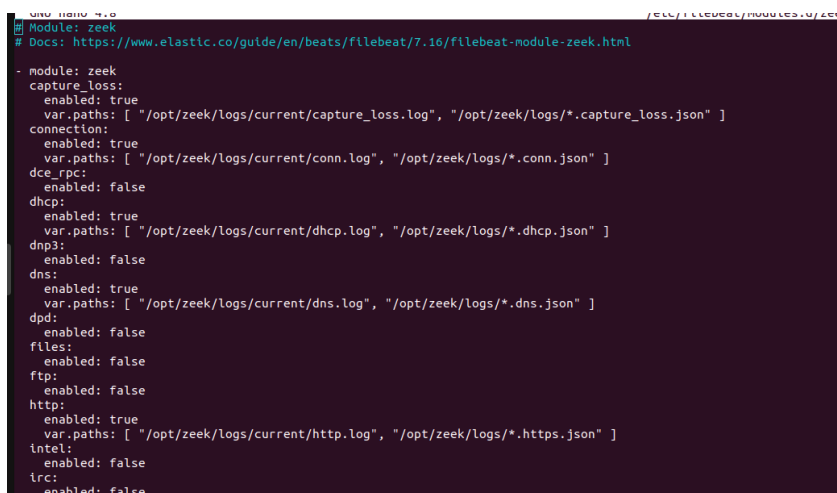

```
module: zeek
capture_loss:
  enabled: true
  var.paths: [ "/opt/zeek/logs/current/capture_loss.log", "/opt/zeek/logs/*.capture_loss.json" ]
connection:
  enabled: true
  var.paths: [ "/opt/zeek/logs/current/conn.log", "/opt/zeek/logs/*.conn.json" ]
dce_rpc:
  enabled: false
dhcp:
  enabled: true
  var.paths: [ "/opt/zeek/logs/current/dhcp.log", "/opt/zeek/logs/*.dhcp.json" ]
dnp3:
  enabled: false
dns:
  enabled: true
  var.paths: [ "/opt/zeek/logs/current/dns.log", "/opt/zeek/logs/*.dns.json" ]
dpt:
  enabled: false
files:
  enabled: false
ftp:
  enabled: false
http:
  enabled: true
  var.paths: [ "/opt/zeek/logs/current/http.log", "/opt/zeek/logs/*.https.json" ]
intel:
  enabled: false
irc:
  enabled: false
```

Figure 4: *zeek.yml* configuration

Refer to Figure 3 and make sure the settings are done correctly.

As we have changed a few configurations of Zeek, we need to re-deploy it, which can be done by executing the following command:

```
cd /opt/zeek/bin
```

```
./zeekctl deploy
```

Now we need to enable the Zeek module in Filebeat so that it forwards the logs from Zeek. Execute the following command:

```
sudo filebeat modules enable zeek
```