

We are almost ready; in the last step, configure the `zeek.yml` file to mention what type of data is to be logged. This can be done by modifying the `/etc/filebeat/modules.d/zeek.yml` file.

In this `.yml` file, we must mention the directory where these specified logs are stored. We know that the

logs are stored in the current folder, which has several files like `dns.log`, `conn.log`, `dhcp.log`, and many more. We need to mention each path in each section. You can leave unwanted files by changing the enabled value to false, if and only if you don't want logs from that file/program.

For example, for `dns`, make sure the enabled value is `true` and the path is mentioned as:

```
var.paths: [ "/opt/zeek/logs/current/dns.log", "/opt/zeek/logs/*.dns.json" ]
```

Repeat this for the rest of the

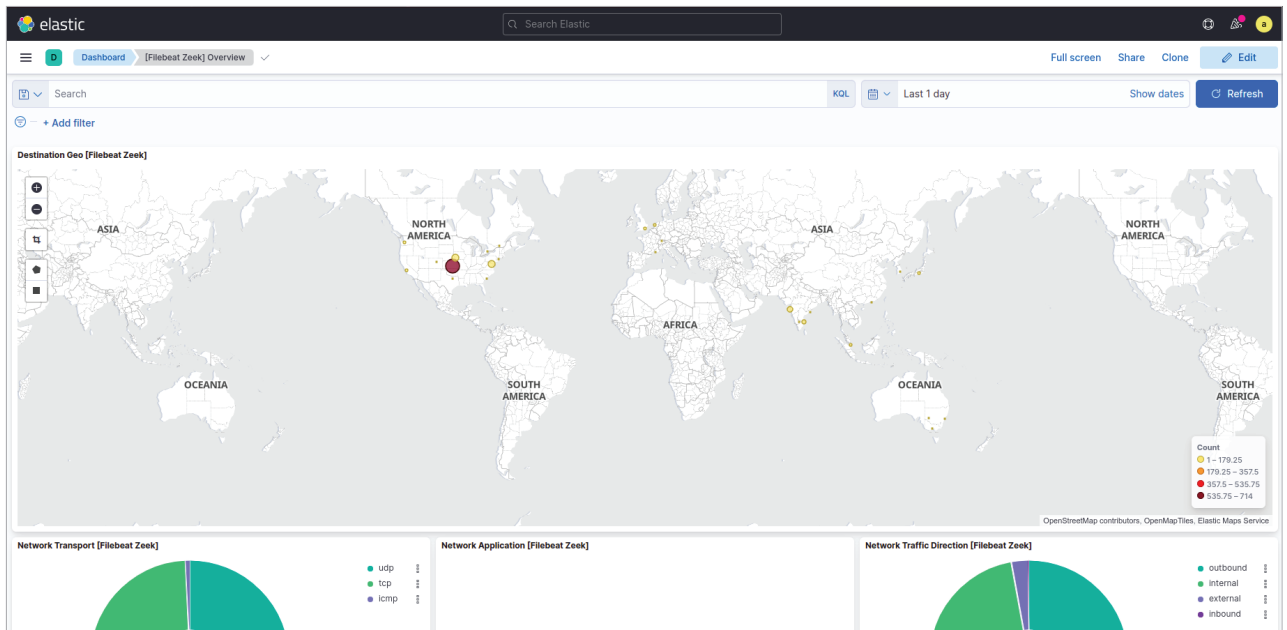


Figure 5: Dashboard of Kibana (Destination Geo)

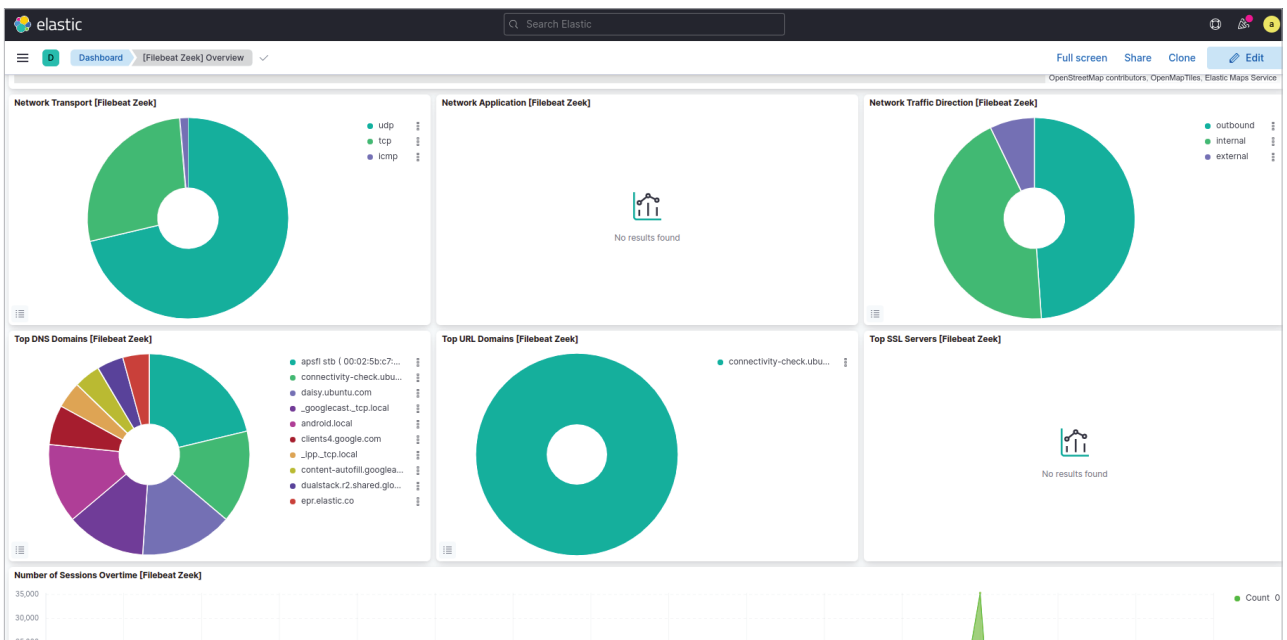


Figure 6: Dashboard of Kibana (Network)