

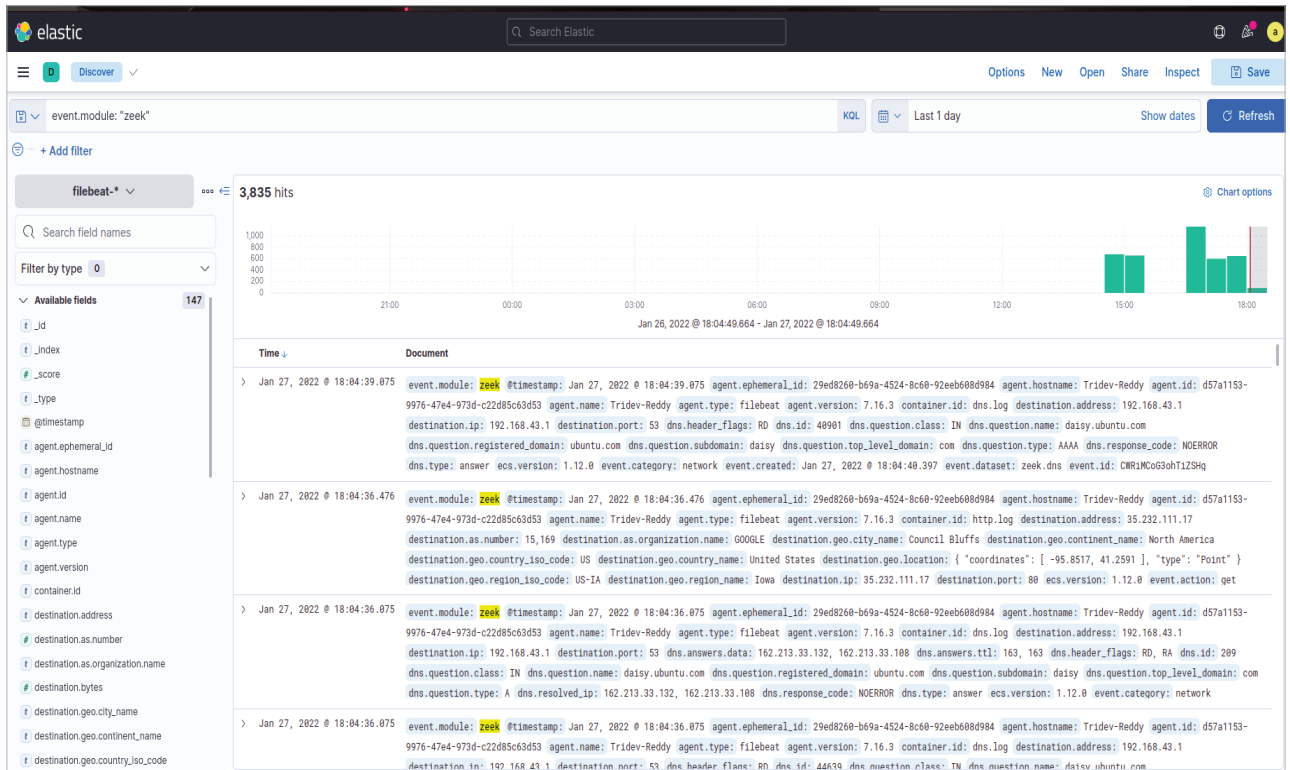


Figure 7: Filtered data by `event.module` query

files. We did this for a few that we needed. We added everything that was mainly required. You can do the same. Refer to Figure 4.

Now it's time to start the Filebeat. Execute the following commands:

```
sudo filebeat setup
sudo service filebeat start
```

Now that everything is done, let's move to our Kibana dashboard and check whether we are receiving the data from Zeek via Filebeat or not.

Navigate to the dashboard; you can see a clear statistical analysis of the data it has captured (Figure 5 and Figure 6).

Now let's move to the *Discover* tab and check the results by filtering using the query:

```
event.module: "zeek"
```

This query will filter all the data it received in a certain time and show us only the data from the module named Zeek (Figure 7).

Acknowledgements

The authors are grateful to Sibi Chakkaravarthy Sethuraman, Sudhakar Ilango, Nandha Kumar R. and Anupama Namburu at the School of Computer Science and Engineering, VIT-AP for their continuous guidance and support. A special thanks to the Center for Excellence in Artificial Intelligence and Robotics (AIR). 

 By: Tridev Reddy and Aditya Mitra

Both the authors like to work in the field of network analysis, IoT and security.

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource

ForYou

The latest from the Open Source world is here.

OpenSourceForU.com

Join the community at facebook.com/opensourceforu

Follow us on Twitter @OpenSourceForU