

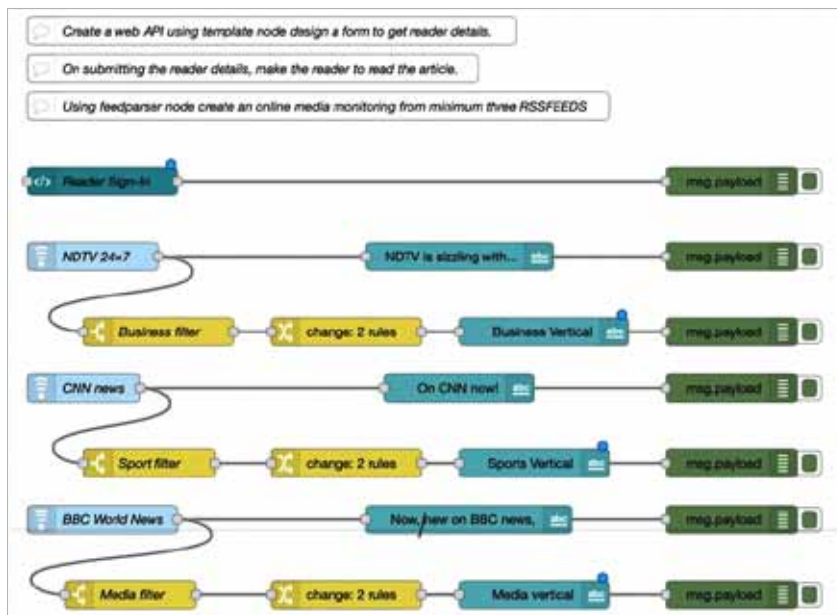


Figure 2: Complete Node-RED flow of the online media monitoring system

Figure 3: Feedparser node property configurations

```

1 <style>
2 input[type=text] {
3   font-size: 12px;
4   width: 200%;
5   padding: 10px 10px;
6   border-radius: 4px;
7   margin: 2px 0;
8   box-sizing: border-box;
9 }
10 input[type=button] {
11   background-color: #8db9cb;
12   color: white;
13   font-size: 15px;
14   padding: 10px 10px;
15   border-radius: 4px;
16   margin: 2px 2px;
17   position: relative;
18 }
19 </style>
20 <h2 style="font-family: Gill Sans;">Reader Sign-In</h2><br>
21 <form action="/action_page.php">
22 <table>
23

```

Figure 4: Template node property configurations

This article focuses on creating an automated online media monitoring system using Web APIs (application programming interfaces). This is done by incorporating a *template* node to design a user form that gets readers' details. After the details are submitted, the system enables the reader to read the article. Using the *feedparser* node, this automated system is created for three RSS feeds for the popular news channels BBC, NDTV and CNN. From every feed, news on three verticals (such as sports, economics, and education) is filtered. The outputs are displayed in the Node-RED debug monitor and UI dashboard

Procedure to construct and build the flow using Node-RED

- Install the latest version of Node.js from <https://nodejs.org/en/download/>
- Install Node-RED through the command window by giving the following command:

```
npm install -g node-red
```

- Through the browser, get access to the Node-RED flow using the IP address `http://127.0.0.1:1880`
- From the 'Node palette' of Node-RED, insert the appropriate nodes, configure their properties, and wire them.
- Confirm deployment by clicking on the 'Deploy' option.
- View the output through the 'Debug' monitor window and dashboard UI.

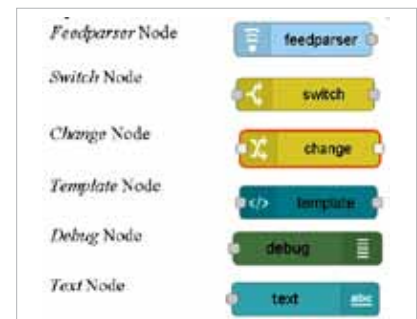


Figure 5: Nodes for online media monitoring