

```
jishnusaurav@jishnusaurav-IdeaPad-L340-15IRH-Gaming:~$ sudo systemctl start rethinkdb
jishnusaurav@jishnusaurav-IdeaPad-L340-15IRH-Gaming:~$ sudo systemctl status rethinkdb
● rethinkdb.service - LSB: This starts a set of rethinkdb server instances.
   Loaded: loaded (/etc/init.d/rethinkdb; generated)
   Active: active (exited) since Thu 2021-10-28 00:57:14 IST; 1min 2s ago
     Docs: man:systemd-sysv-generator(8)
    Tasks: 0 (limit: 4915)
   CGroup: /system.slice/rethinkdb.service

Oct 28 00:57:14 jishnusaurav-IdeaPad-L340-15IRH-Gaming systemd[1]: Starting LSB:
Oct 28 00:57:14 jishnusaurav-IdeaPad-L340-15IRH-Gaming rethinkdb[26969]: rethink
Oct 28 00:57:14 jishnusaurav-IdeaPad-L340-15IRH-Gaming rethinkdb[26969]: rethink
Oct 28 00:57:14 jishnusaurav-IdeaPad-L340-15IRH-Gaming systemd[1]: Started LSB:
lines 1-11/11 (END)
```

Figure 5: Starting and checking the status of RethinkDB

```
jishnusaurav@jishnusaurav-IdeaPad-L340-15IRH-Gaming:~$ rethinkdb
Running rethinkdb 2.4.1-0bionic (CLANG 6.0.0 (tags/RELEASE_600/final))...
Running on Linux 5.4.0-89-generic x86_64
Loading data from directory /home/jishnusaurav/rethinkdb_data
Listening for intracluster connections on port 29015
Listening for client driver connections on port 28015
Listening for administrative HTTP connections on port 8080
Listening on cluster addresses: 127.0.0.1, ::1
Listening on driver addresses: 127.0.0.1, ::1
Listening on http addresses: 127.0.0.1, ::1
To fully expose RethinkDB on the network, bind to all addresses by running rethi
nkdb with the '--bind all' command line option.
Server ready, "jishnusaurav-IdeaPad-L340-15IRH-Gaming_2wg" 4ecf96c2-727b-4a8a-a1
3d-0e60b5481c86
```

Figure 6: Setting the RethinkDB server

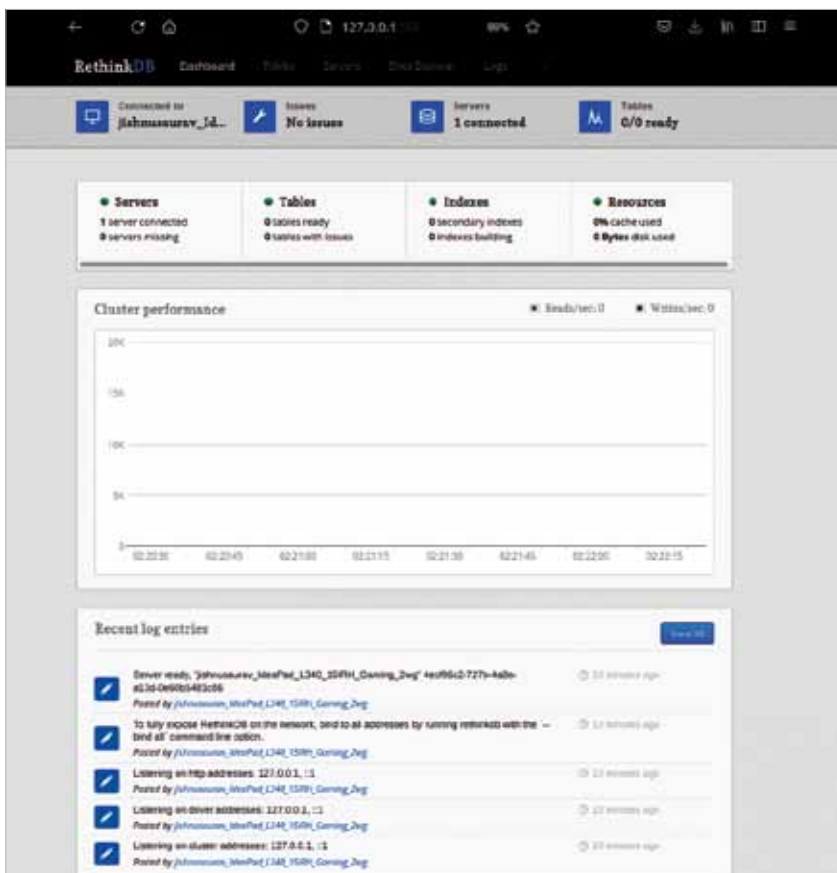


Figure 7: Opening the RethinkDB UI on the browser

```
wget -qO- https://download.
rethinkdb.com/repository/raw/
pubkey.gpg | sudo apt-key add -
```

After adding new repositories, our package manager has to be updated using the following command, as shown in Figure 3.

```
sudo apt update
```

Once this is done, we can install RethinkDB using the following command, as shown in Figure 4.

```
sudo apt-get install rethinkdb
```

After installation, we first need to start it by running the following command:

```
sudo systemctl start rethinkdb
```

To check if it has started properly, enter the following command, as shown in Figure 5:

```
sudo systemctl status rethinkdb
```

We can now start using it. To set it up, enter 'rethinkdb' on the terminal, as shown in Figure 6.

To open up the database server, enter the IP address with port number 8080 on the browser, as shown in Figure 7.

RethinkDB can now be used as any NoSQL database. It's great fun to explore it and use it to its fullest potential!! **END** 🐧

By: Jishnu Saurav Mittapalli

The author is a full stack Web developer, interested in modern technologies like artificial intelligence and machine learning. He is currently working in the field of natural language processing.