

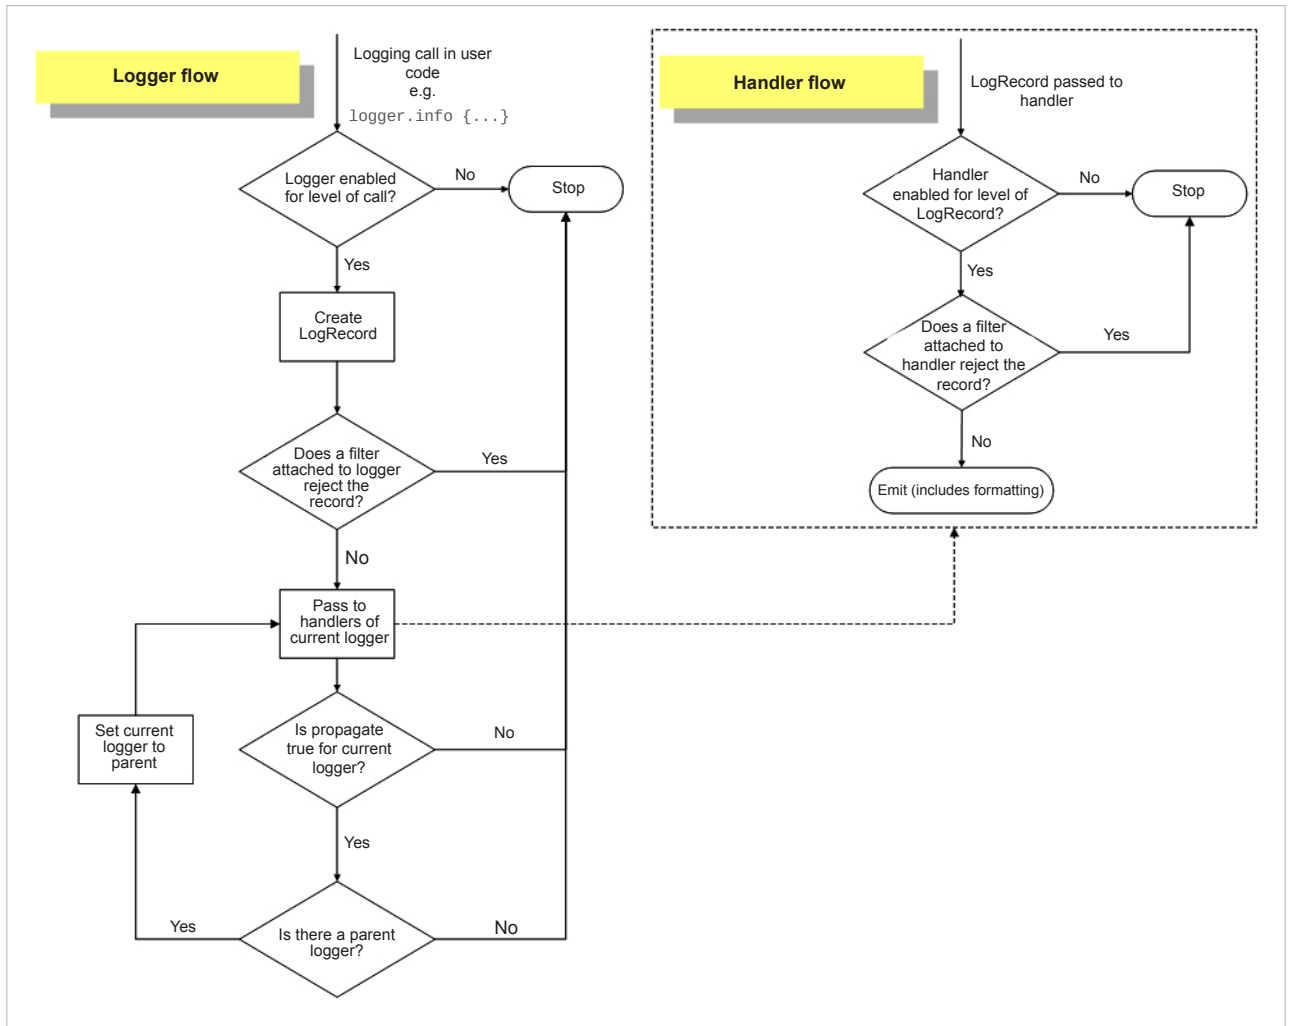


Figure 1: Logging flow (Source: <https://docs.python.org/3/howto/logging.html>)

with the debug level set and the formatter is created with time, module name, level and message.

```
import logging
# create logger
logger = logging.getLogger(__name__)
logger.setLevel(logging.DEBUG)
# create console handler and set level to debug
ch = logging.StreamHandler()
ch.setLevel(logging.DEBUG)
# create formatter
formatter = logging.Formatter('%(asctime)s - %(name)s - %(levelname)s - %(message)s')
# add formatter to ch
ch.setFormatter(formatter)
# add ch to logger
logger.addHandler(ch)
# 'application' code
```

```
logger.debug('debug message')
logger.info('info message')
logger.warning('warn message')
logger.error('error message')
logger.critical('critical message')
```

The output is:

```
$ python handlerconfig.py
```

```
2021-11-28 14:45:45,096 - __main__ - DEBUG - debug message
2021-11-28 14:45:45,097 - __main__ - INFO - info message
2021-11-28 14:45:45,097 - __main__ - WARNING - warn message
2021-11-28 14:45:45,097 - __main__ - ERROR - error message
2021-11-28 14:45:45,097 - __main__ - CRITICAL - critical message
```

2. By creating a logging *config* file and reading it using the *fileConfig()* function.