

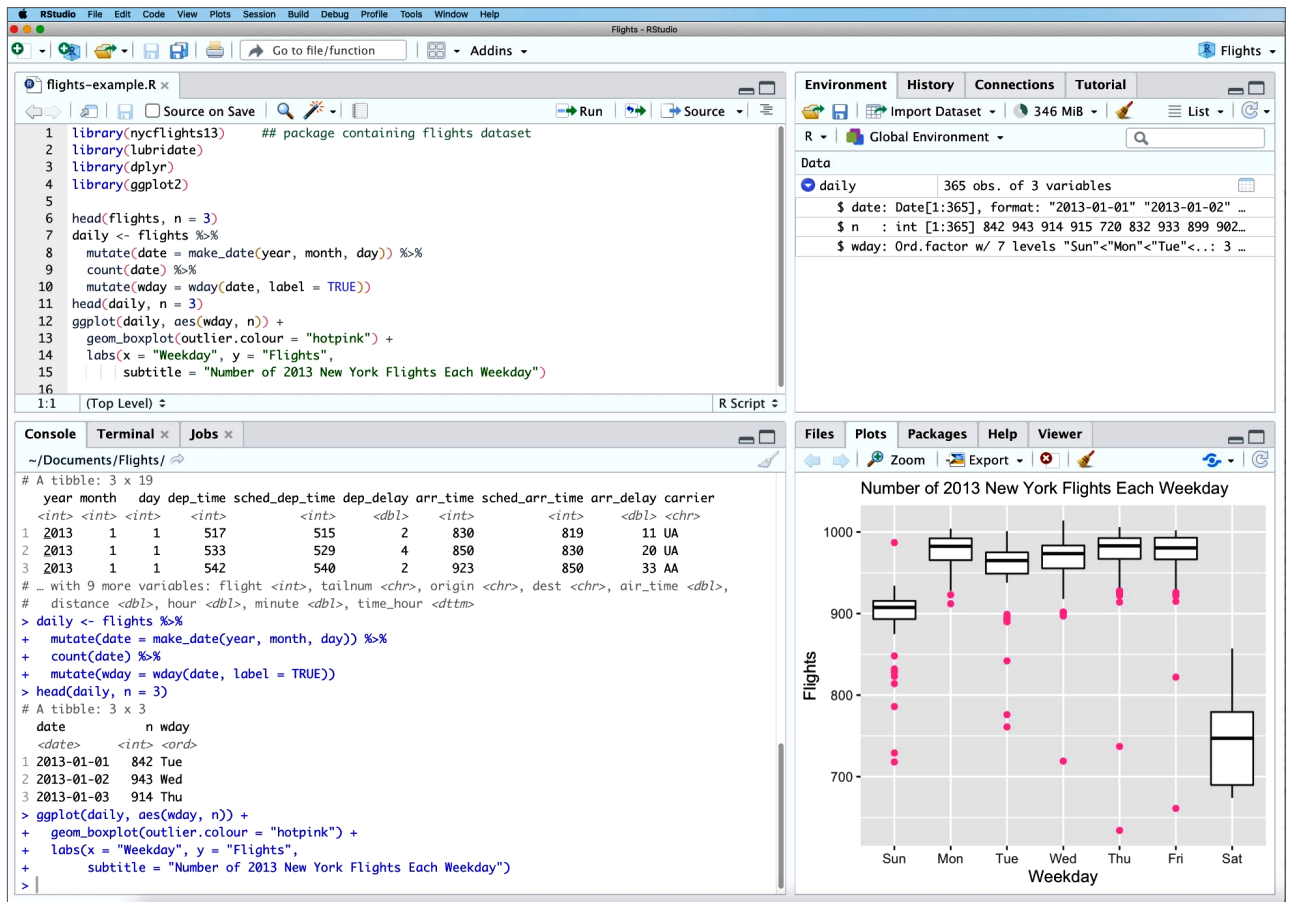


Figure 1: RStudio

```

** R
** inst
** byte-compile and prepare package for lazy loading
** help
*** installing help indices
*** copying figures
** building package indices
** testing if installed package can be loaded from
temporary location
** testing if installed package can be loaded from final
location
** testing if installed package keeps a record of temporary
installation path
* DONE (shiny)

```

There are pre-built examples and demos provided by the installed Shiny package. You can test one of the examples using the following commands:

```

> library(shiny)
> runExample("02.text")
Listening on http://127.0.0.1:3535

```

The app listens on a port and you need to set the default R browser in `/etc/R/Renviron`. For example, on Parabola GNU/Linux-libre, the setting is updated to use the Icedweasel (Firefox) browser as follows:

```

## Default browser
R_BROWSER=${R_BROWSER-'usr/bin/iceweasel'}

```

The source code for the app defines the user interface and the server logic. A fluid layout is used for the panel, and the input selection consists of drop-down menus and text boxes. The server logic uses a reactive programming style to handle the input and displays the data.

```

library(shiny)
# Define UI for dataset viewer app ----
ui <- fluidPage(
  # App title ----
  titlePanel("Shiny Text"),
  # Sidebar layout with a input and output definitions ----
  sidebarLayout(
    # Sidebar panel for inputs ----
    sidebarPanel(

```