


The Functions in the R Stats Package

We have learnt the basics of the R programming language, its syntax and semantics, and are now ready to delve into the statistics domain using R. In this eleventh article in the R series, we will learn to use the statistics functions available in the R stats package.

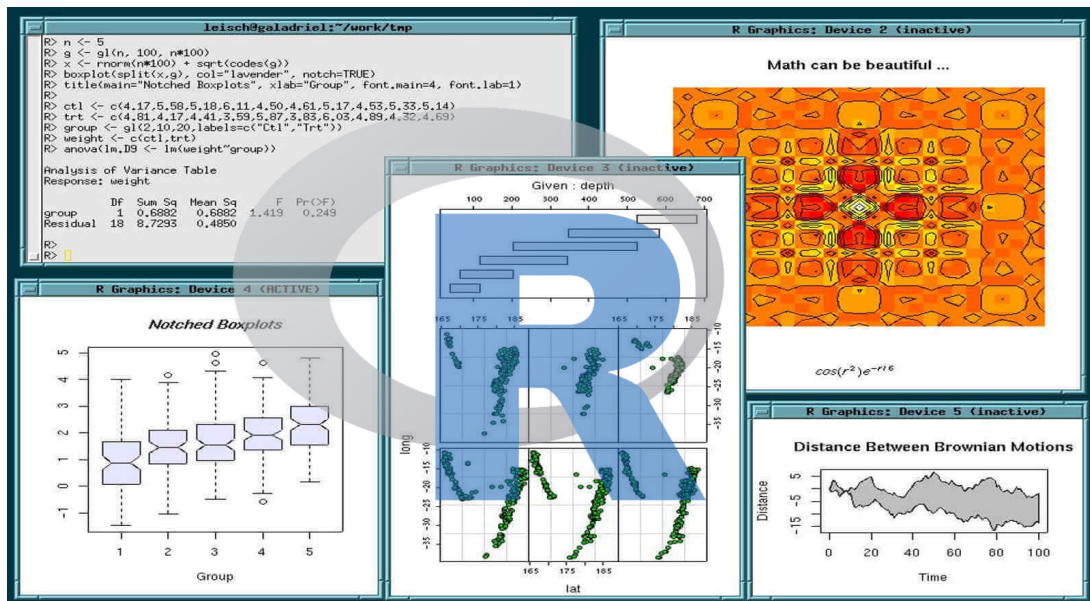

As we have done in the earlier parts of this series, we are going to use the R version 4.1.2 installed on Parabola GNU/Linux-libre (x86-64) for the code snippets.

```
$ R --version
R version 4.1.2 (2021-11-01) -- "Bird Hippie"
Copyright (C) 2021 The R Foundation for Statistical Computing
Platform: x86_64-pc-linux-gnu (64-bit)
```

R is free software and comes with ABSOLUTELY NO WARRANTY. You are welcome to redistribute it under the terms of the GNU General Public License versions 2 or 3. For more information about these matters see <https://www.gnu.org/licenses/>.

Mean

The R function for calculating the arithmetic mean is *mean*.

It accepts an R object 'x' as an argument, and a 'trim' option to trim any fractions before computing the mean value. The 'na.rm' logical argument can be used to ignore any NA values. Its syntax is as follows:

```
mean(x, trim = 0, na.rm = FALSE, ...)
```

The function supports numerical and logical values, as well as date and time intervals. A few examples for the mean function are given below:

```
> mean(c(1, 2, 3))
2
```

```
> mean(c(1:5, 10, 20))
6.428571
```

```
> mean(c(FALSE, TRUE, FALSE))
```