

```
agg('sum').sort_values(ascending=False)
[0:20]
#creating the subplot
fig,axs = plt.subplots(nrows=2, ncols=1,
figsize = (12,12))
plt.subplots_adjust(hspace = 0.3)
fig.suptitle('Best Selling Products by
Amount and Value', fontsize=15, x =
0.4, y = 0.98)
sns.barplot(x=TopTwenty.values,
y=TopTwenty.index, ax= axs[0]).
set(xlabel='Total amount of sales')
axs[0].set_title('By Amount', size=12,
fontweight = 'bold')
sns.barplot(x=Top20Price.values,
y=Top20Price.index, ax= axs[1]).
```

```
set(xlabel='Total value of sales')
axs[1].set_title('By Value', size=12,
fontweight = 'bold')
plt.show()
```

We can see the output in Figure 3.
Now let us find out the items
that were returned the most, and the
customers with the corresponding
country:

```
ReturnedItems = Cleaned_Data[Cleaned_
Data.Quantity<0].groupby('Description')
['Quantity'].sum()
ReturnedItems = ReturnedItems.abs().
sort_values(ascending=False)[0:10]
```

```
ReturnCust = Cleaned_Data[Cleaned_Data.
Quantity<0].groupby(['CustomerID','Coun
try'])['Quantity'].sum()
ReturnCust = ReturnCust.abs().sort_
values(ascending=False)[0:10]
```

```
#creating the subplot
fig, [ax1, ax2] = plt.subplots(nrows=2,
ncols=1, figsize=(12,10))
ReturnedItems.sort_values().
plot(kind='barh', ax=ax1).
set_title('Most Returned Items',
fontsize=15)
ReturnCust.sort_values().
plot(kind='barh', ax=ax2).set_
title('Customers with Most Returns',
```

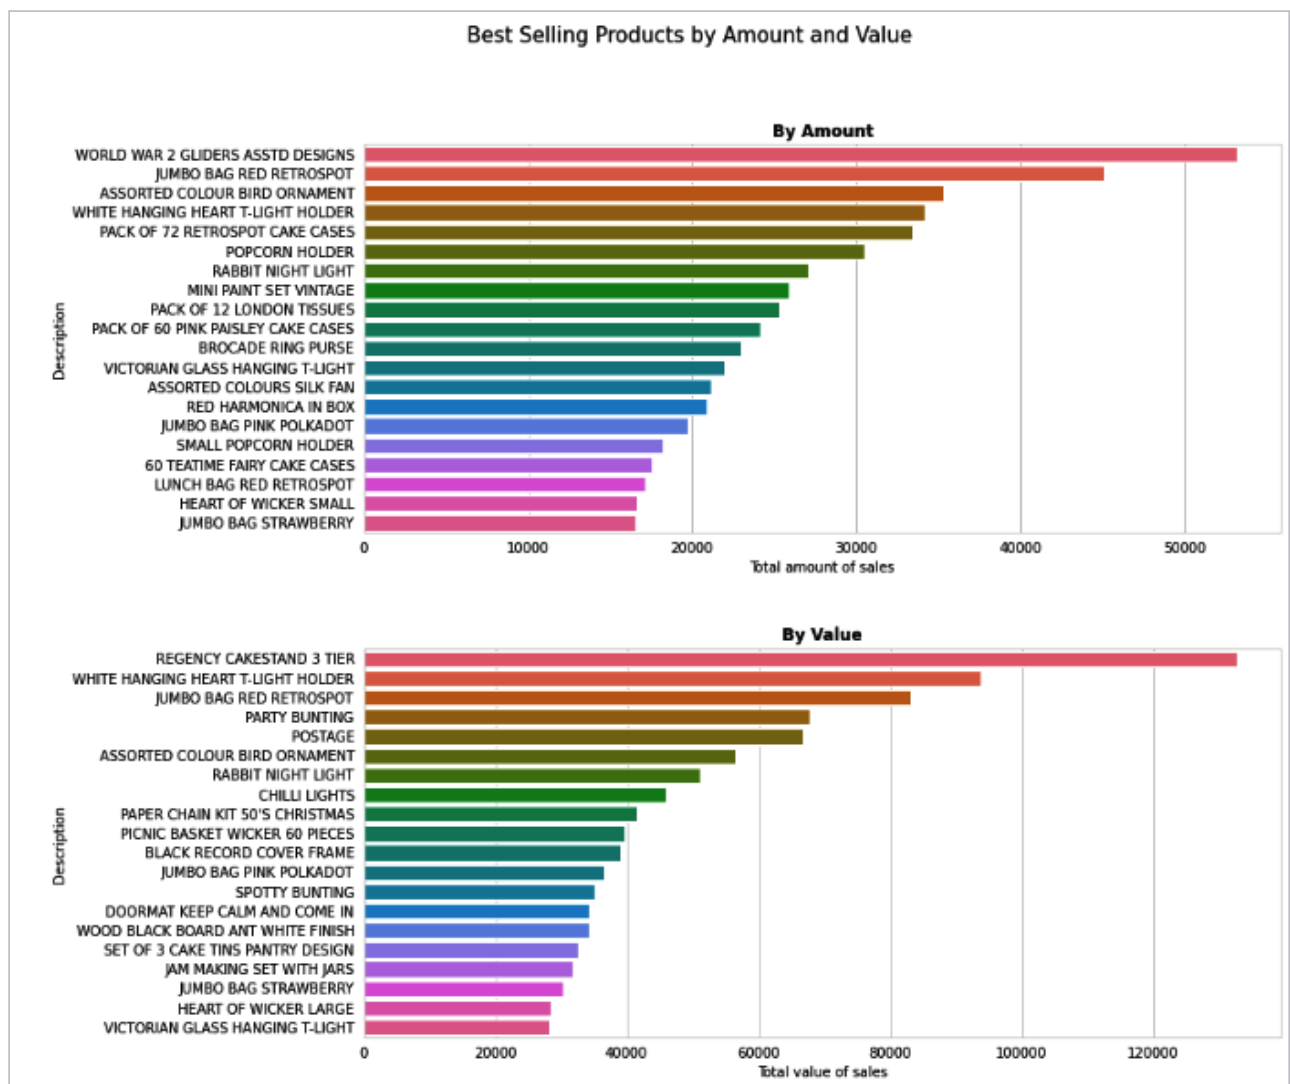


Figure 3: Top 20 products by quantity and price