

operation to see the information of all three students (Figure 10).

Let's move on to the 'views.py' code for 'PUT' and 'DELETE' operations, which correspond to the 'Update' and 'Delete' operations in CRUD:

```
class StudentDetails(APIView):
    def get_object(self,pk):
        try:
            return Studentinfo.objects.
get(pk=pk)
        except Studentinfo.
DoesNotExist:
            return
        HttpResponse(status=status.HTTP_404_
NOT_FOUND)

    def get(self,request,pk):
        article=self.get_object(pk)
        serializer=Studentserializer(a
rticle)
        return Response(serializer.
data)

    def put(self,request,pk):
        article=self.get_object(pk)
        serializer=Studentserializer(ar
ticle,data=request.data)
        if serializer.is_valid():
            serializer.save()
            return Response(serializer.
data)
        return Response(serializer.
errors,status=status.HTTP_400_BAD_
REQUEST)

    def delete(self,request,pk):
        article=self.get_object(pk)
        article.delete()
        return Response(status=status.
HTTP_204_NO_CONTENT)
```

The 'get_object' function aims to obtain the object within the existing table having the same primary key value, i.e., 'pk' as the one entered in the URL. It will return an error message if no entry in our model exists with the entered primary key

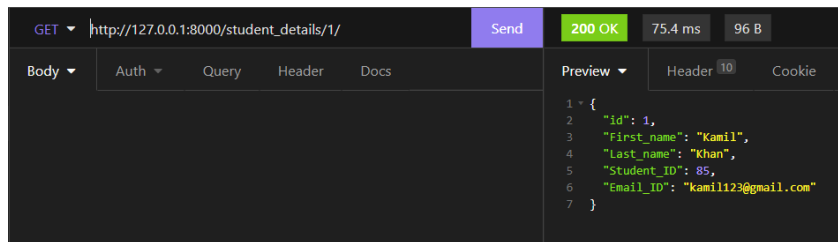


Figure 11: GET-ting individual student info

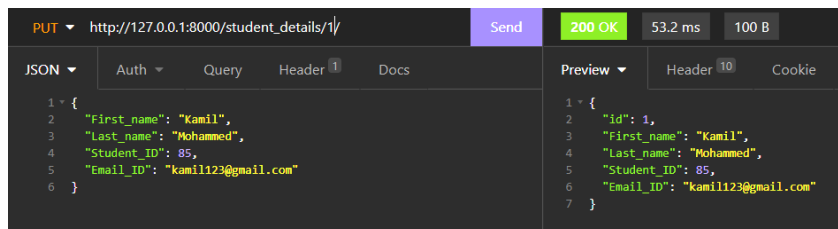


Figure 12: PUT-ting student info

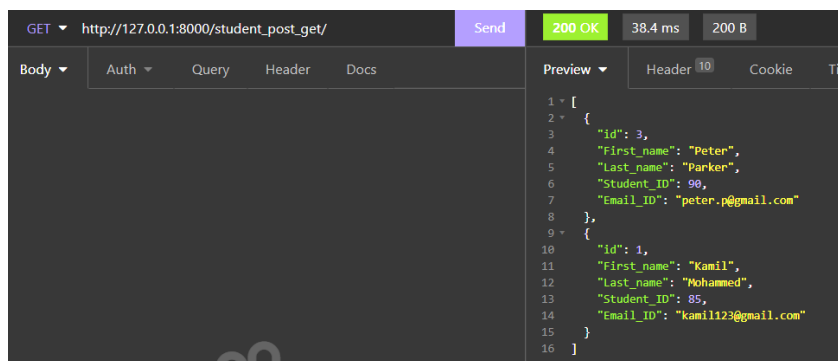


Figure 13: Updated 'GET' output

value. The 'get' function simply displays the model entry with the given 'pk'. 'get', 'put' and 'delete' functions make use of the 'get_object' function and treat it as the first step in trying to obtain the required individual value. Add the required URL in 'urls.py':

```
path("student_details/<int:pk>/",Stud
entDetails.as_view(),
),
```

In Figure 12, I aimed to change just the 'Last_name' of the student

with *pk=1*. The change will be reflected when you 'GET' all student info.

We will now delete the entry in the model having *pk=2*. All you have to do is enter 2 in the URL as '*http://127.0.0.1:8000/student_details/2/*' and perform the 'DELETE' operation. Let's see if the same is reflected in the model.

Having gone through the article, you would have grasped an idea of the absolute basics of generating APIs; specifically, how to perform CRUD operations. **END** 🐧

By: Mohammed Kamil Khan

The author is currently working at Vamstar as a data discovery expert.