

Argument	Description
<i>data</i>	A data frame containing values
<i>groups</i>	A grouping variable in the data
<i>main</i>	The title of the chart
<i>scales</i>	A list that specifies how the axes are to be drawn
<i>strip</i>	A logical condition on whether to draw strips
<i>x</i>	The primary numeric variable
<i>xlab</i>	The label for x-axis
<i>xlim</i>	A numeric vector that specifies left and right limits for x-axis
<i>ylab</i>	The label for y-axis
<i>ylim</i>	A numeric vector of length two that mentions lower and upper limits for y-axis

The barchart function

The `bar chart` function produces a bar chart for the given data. In the following example, we specify a function to the `axis` argument to use the year on the x-axis.

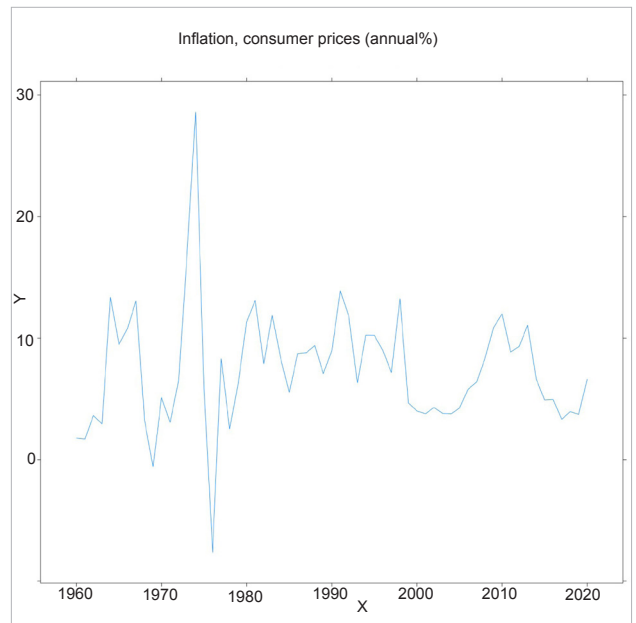


Figure 1: Line chart

```
> barchart(y~x|x, data=d, horizontal=FALSE,
axis=function(side, ...) { if (side=="bottom") panel.
axis(at=seq_along(d$x), label=d$x, outside=TRUE, rot=0,
tck=0) else axis.default(side, ...)}, main="Inflation,
consumer prices (annual %)")
```

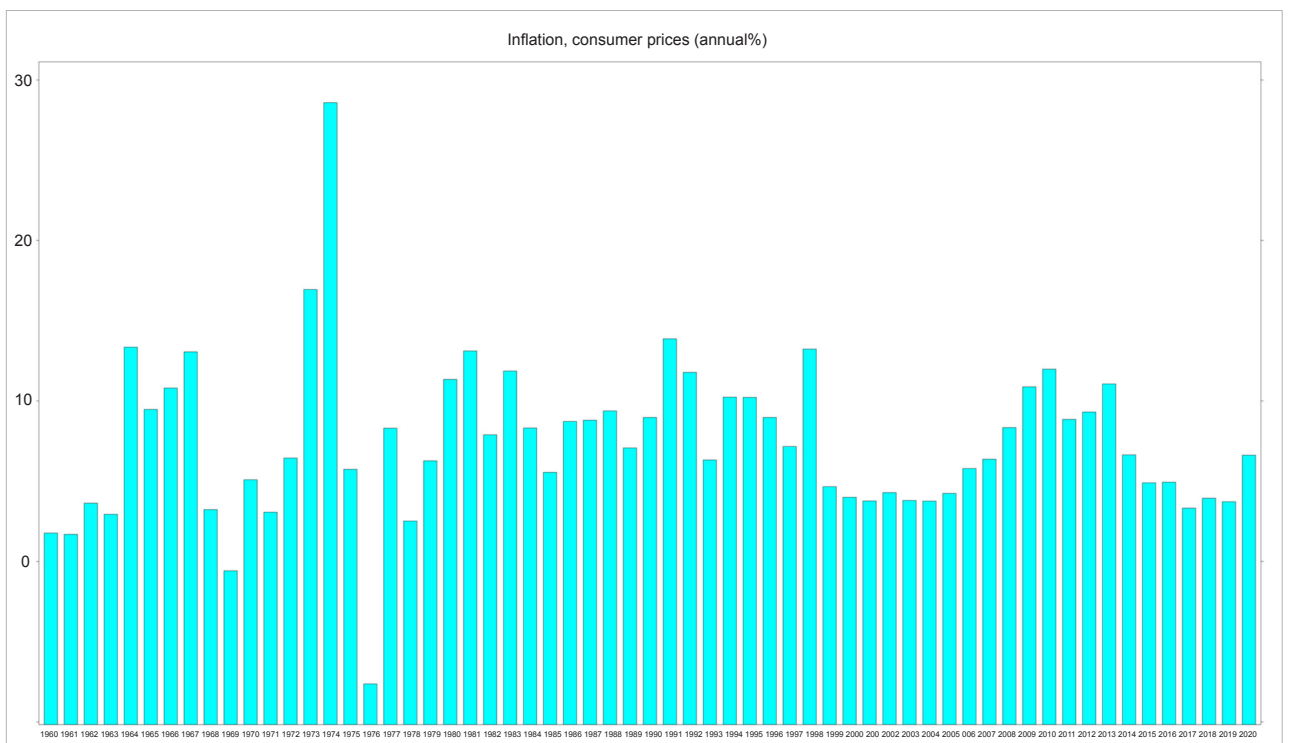


Figure 2: Bar chart