

```
> xyplot(x=Group.1|Group.1, ap, groups=Group.1, main="Andhra Pradesh Consumer Price Index upto November 2021", xlab="Year", ylab="Consumer Price Index", auto.key=TRUE)
```

The output chart produced by R is as shown in Figure 4.

In addition to the above listed plotting functions, lattice provides the *bwplot* function for box-and-whisker plots, and the *stripplot* function for one-dimensional scatter plots.

ggplot2

The *ggplot2* R package implements a grammar of graphics that specifies how to plot data. You can install the package using the following command:

```
> install.packages("ggplot2")
```

```
*** installing help indices
*** copying figures
** building package indices
** installing vignettes
** testing if installed package can be loaded from temporary location
** testing if installed package can be loaded from final location
** testing if installed package keeps a record of temporary installation path
* DONE (ggplot2)
```

The library needs to be loaded into the R session before you can use its functions:

```
> library(ggplot2)
```

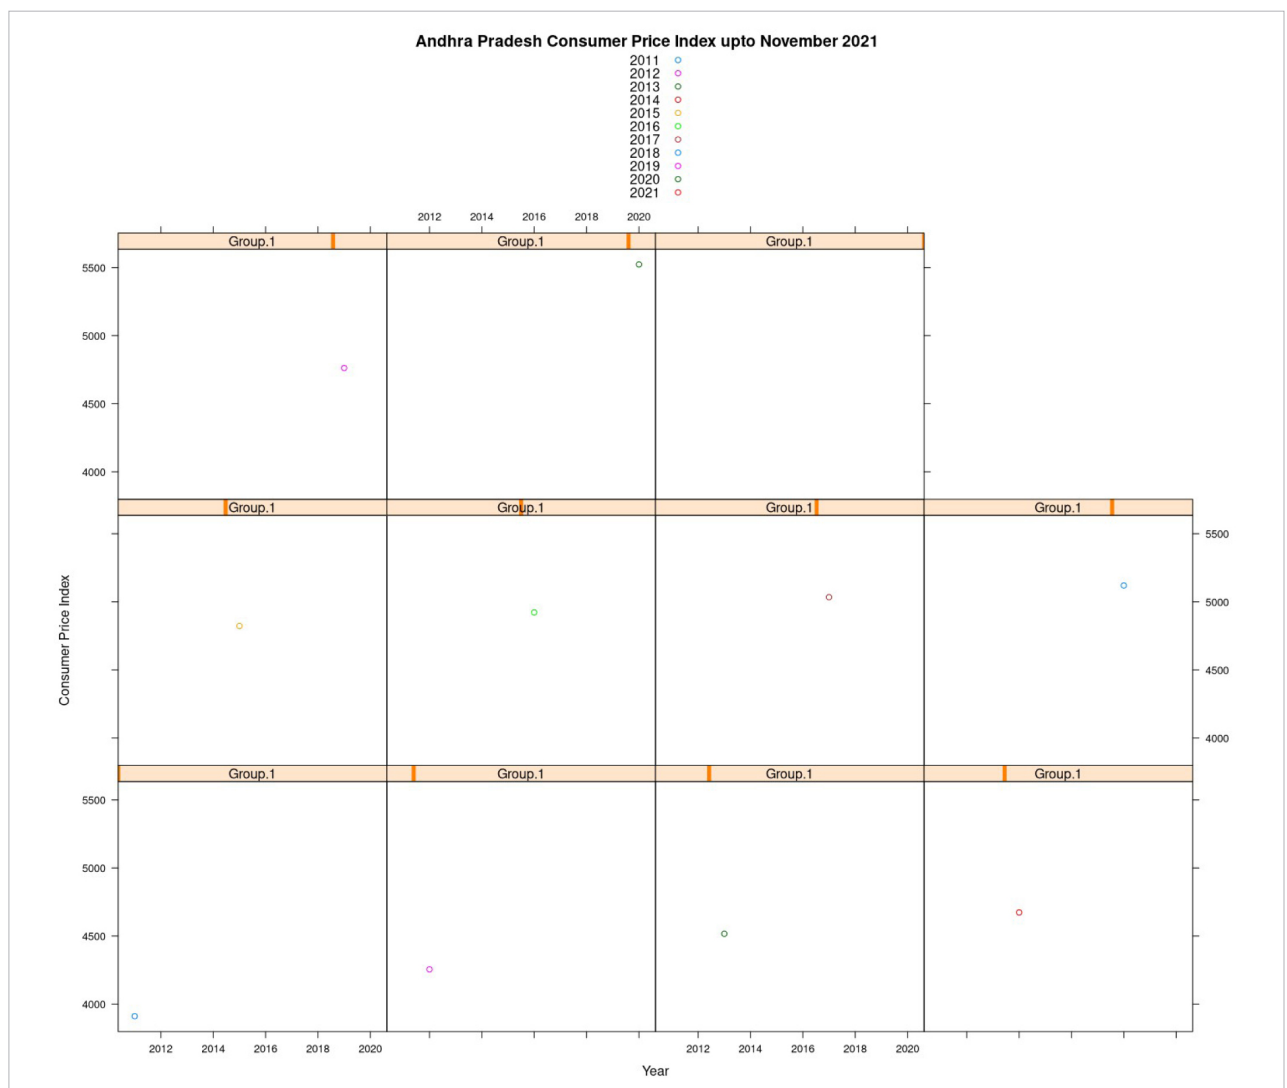


Figure 4: Grouping chart