

Bar chart

The geometry argument can be specified as 'bar' to produce a bar chart, as indicated below:

```
> qplot(x=job, data=bank, geom="bar", weight=balance,
ylab="Balance", xlab="Category")
```

The produced bar chart is shown in Figure 7.

We can also list a summary of the chart by storing the results of the plot to a variable, and invoking the *summary* function on the same. For example:

```
> barchart <- qplot(x=job, data=bank, geom="bar",
weight=balance, ylab="Balance", xlab="Category")

> summary(barchart)
data: age, job, marital, education, default, balance,
housing, loan,
      contact, day, month, duration, campaign, pdays, previous,
poutcome, y
[4521x17]
mapping: x = ~job, weight = ~balance
faceting: <ggproto object: Class FacetNull, Facet, gg>
compute_layout: function
draw_back: function
draw_front: function
draw_labels: function
draw_panels: function
finish_data: function
init_scales: function
map_data: function
params: list
```

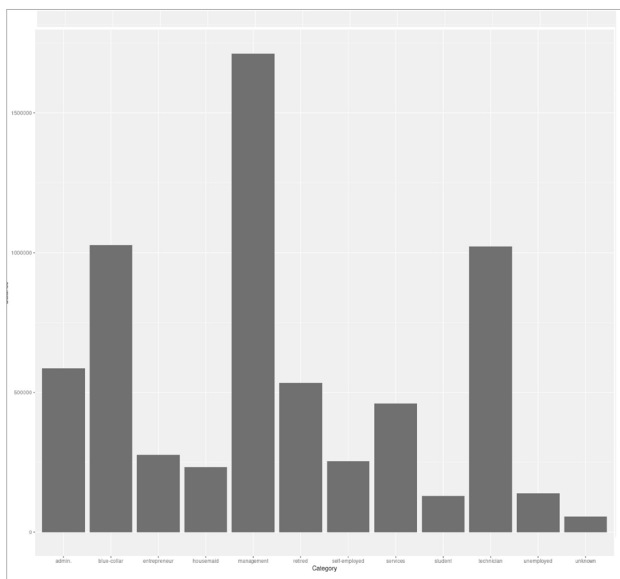


Figure 7: Bar chart

```
setup_data: function
setup_params: function
shrink: TRUE
train_scales: function
vars: function
super: <ggproto object: Class FacetNull, Facet, gg>
```

```
geom_bar: width = NULL, na.rm = FALSE, orientation = NA
stat_count: width = NULL, na.rm = FALSE, orientation = NA
position_stack
```

The *qplot* function accepts the following arguments:

Argument	Description
<i>asp</i>	The y/x aspect ratio
<i>data</i>	Optional data frame that contains x and y
<i>geom</i>	The geometry to use
<i>main</i>	The title of the chart
<i>margin</i>	Display margins
<i>position</i>	The adjustments to specify the position
<i>x</i>	X values
<i>xlab</i>	The x-axis label
<i>xlim</i>	The limits for the x-axis
<i>y</i>	Y values
<i>ylab</i>	The y-axis label
<i>ylim</i>	The limits for the y-axis

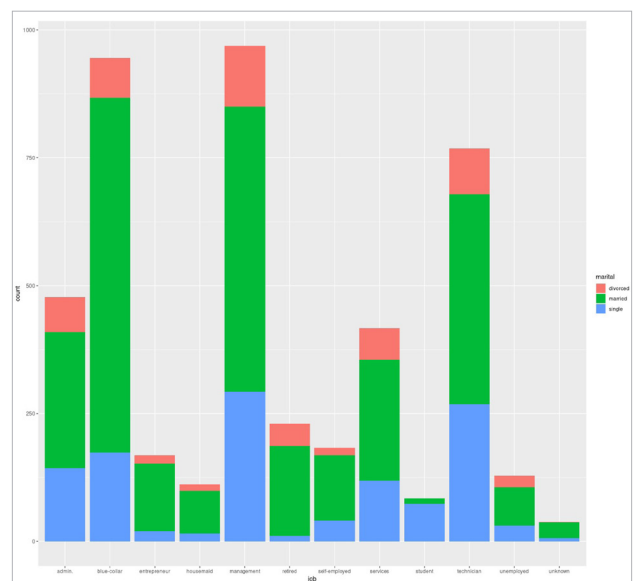


Figure 8: *ggplot* categorical graph