

is given below:

```
Accepted Keys:
Denied Keys:
Unaccepted Keys:
<local system name>
Rejected Keys:
```

Then accept all the keys by using the command:

```
sudo salt-key -A
```

The output is:

```
Accepted Keys:
<local system name>
Denied Keys:
Unaccepted Keys:
Rejected Keys:
```

Sending commands

The interaction between master and minion must be confirmed by running the command:

```
sudo salt '*' test.ping
```

The result of the previous command is given in Figure 2.

Creating a simple SaltStack environment with one Salt master and two minions: To create the SaltStack environment, first install the VirtualBox environment. Download and install VirtualBox from <https://www.virtualbox.org/wiki/Downloads>. Now, create three virtual machines and run them using VirtualBox.

Next, install Vagrant. Vagrant provides simple to configure and portable work environments. You can download and install it from

<https://www.vagrantup.com>. After the installation of Vagrant, we need to configure it. First, create a single file named *Vagrantfile* in a folder. Run Vagrant by using the following command:

```
vagrant up
```

Now, Vagrant creates and starts the machines that are defined in the *vagrantfile* using VirtualBox in the background. To stop all the running machines, use the command:

```
vagrant halt
```

Using Salt-Cli: Now, let us download the set up using the command:

```
cd /cd/to/path
git clone https://github.com/UtahDave/
salt-vagrant-demo
```

Start the demo by using the command:

```
cd /cd/to/path/salt-vagrant-demo
vagrant up
```

The response of the above command is:

```
result
Run the SALT MASTER
```

By using the command given below, log in to the Salt master:

```
vagrant ssh master
```

Move to the root using the command:

```
sudo su
```

We have successfully connected to the Salt master. Now, we will experiment with some basic commands in SaltStack.

List out all the keys: The following command is used to verify the Salt minion connections and view the connection status:

```
salt-key --list-all
```

The outcome of the previous command is:

```
Accepted Keys:
Minion1
Minion2
Denied Keys:
Unaccepted Keys:
Rejected Keys:
Verify Salt Minions
```

Post receiving all the keys, you can send a command from Salt master to check if the Salt minions are listening or not:

```
salt '*' test.ping
```

It will give the following output:

```
Minion1:
  True
Minion2:
  True
```

From the above output, list out minion 1 and minion 2, which means minions are listening properly; otherwise, minions may not respond properly.

You now know what SaltStack is and how to install it. SaltStack makes it simple to set up servers in data centres with minimal installation time. It is an incredible resource because of its ease of use. This article should be able to help you set up SaltStack and easily create or maintain your server for any use case. **END** 🐧

By: Manasa Vemuri

The author is a FOSS enthusiast.

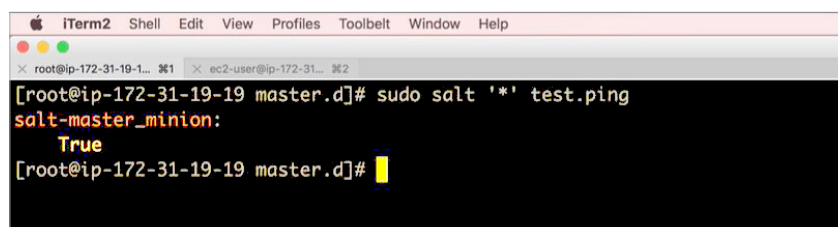


Figure 2: Confirming the interaction between master and minion