

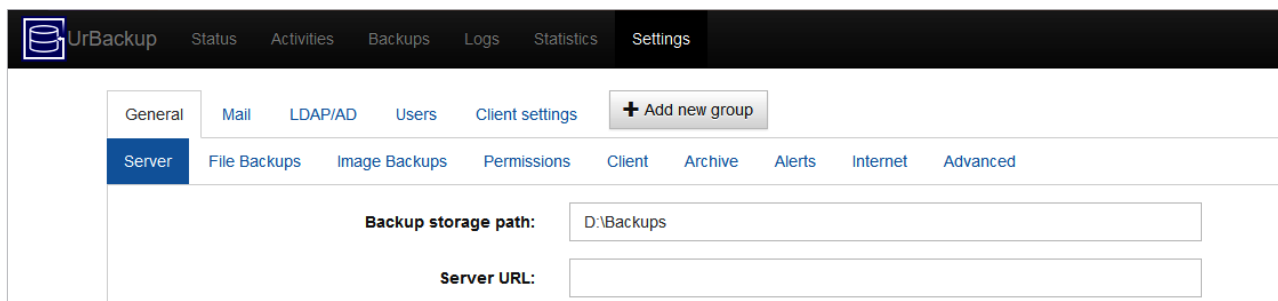


Figure 1: Web interface settings

On-access virus scanner active in temporary file path. This will cause backups to fail once your virus scanner detects a backed up file as a virus. Your virus scanner will also probably scan each backed up file multiple times causing performance problems. You should consider completely disabling the on-access virus scanner on the server or at the very least exclude UrBackup server's temporary path (\\?\D:\Backups\urbackup_tmp_files).

[Ok. Stop showing this error](#)

Figure 2: Error message

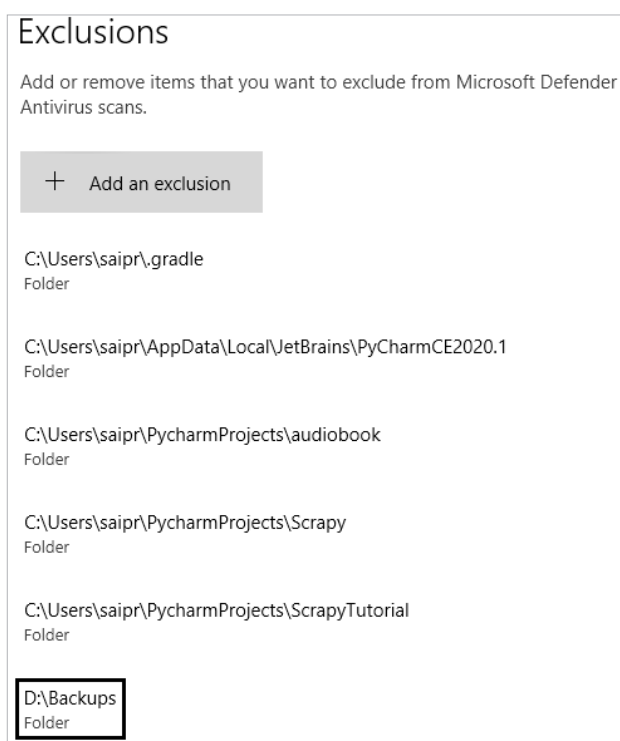


Figure 3: Add exclusion to Windows defender

For more information, you can go to <https://www.windowcentral.com/how-exclude-files-and-folders-windows-defender-antivirus-scans>.

Installation of UrBackup client

If you propose to use the client within the same local network because the server or the client is in your local network during setup time, then you can follow these steps:

1. Download UrBackup client from the link <https://hndl.urbackup.org/Client/2.4.11/UrBackup%20Client%202.4.11.exe>

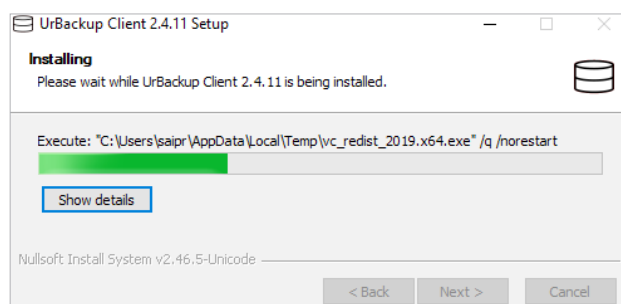


Figure 4: UrBackup client setup

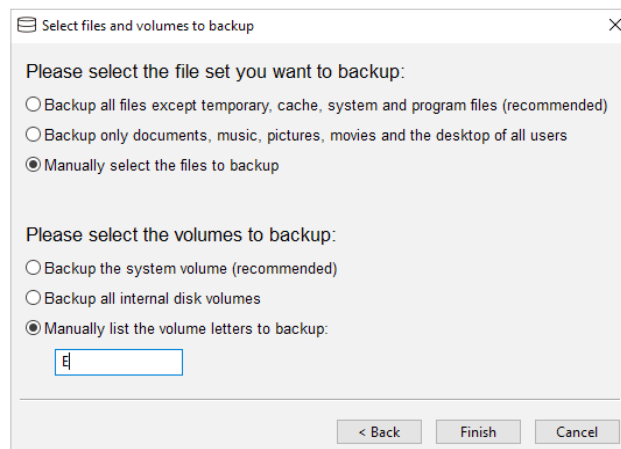


Figure 5: Select files and volumes for backup

2. Run the installer and accept the terms and conditions. This will successfully install the UrBackup client on the client PC.
3. When you click on the *Finish* button, it will open a prompt asking you to select files and volumes to backup.
4. Go to the Web interface of UrBackup. At this point, it will display 'No Recent Backup' in the *File Backup Status* (that's fine because UrBackup is busy indexing the backup). The backup should automatically start after