

Figure 5: Opening account page

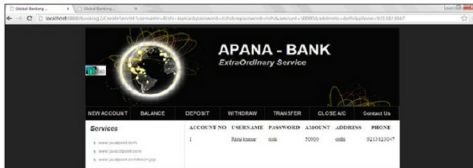


Figure 6: Confirmation of account opened

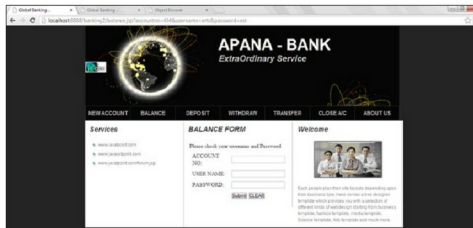


Figure 7: Balance checking page



Figure 8: Deposit form

container creates an instance of it. A Servlet instance is created only once in its life cycle.

- Calling the `init()` method: `init()` is called by the Web container on a Servlet instance to initialise the Servlet.

Signature of `init()` method: `public void init (ServletConfig config) throws ServletException`

- Calling the `service()` method: The containers call the `service()` method each time the request for Servlet is received.

Signature of `service()` method: `public void service(ServletRequest request, ServletResponse response) throws ServletException, IOException`

- Calling the `destroy()` method: The Web container calls the `destroy()` method before removing the Servlet instance, giving a chance for clean-up activity.

An introduction to Oracle

An Oracle database is a collection of data treated as a unit. The purpose of a database is to store and retrieve related information. A database server is the key to solving the problems of information management. In general, a server reliably manages a large amount of data in a multi-user environment so that many users can concurrently access the same data. All this is accomplished while delivering high performance. A database server also prevents unauthorised access and provides efficient solutions for failure recovery.

Oracle Database is the first database designed for enterprise grid computing, and is a flexible and cost-effective way to manage information and applications. Enterprise grid computing creates large pools of industry-standard, modular storage and servers. With this architecture, each new system can be rapidly provisioned from the pool of components. There is no need for peak workloads, because capacity can be