



Figure 1: Monitorix Web interface




Figure 2: System load average, active processes and memory allocation

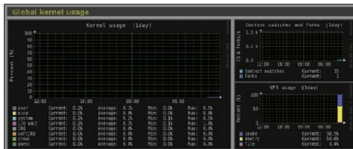


Figure 3: Global kernel usage

SELINUX=disabled

If it is in the enabled state, then graphs are not visible and you will get tons of error messages in the `/var/log/messages` or `/var/log/audit/audit.log` files about access denied to RRD database files.

Till rebooting the system, SELinux is in temporary disabled mode. After rebooting it is permanently get disabled.

2. Install the EPEL repository for extra package dependencies and enable it:

```
## RHEL/CentOS 6 64-Bit ##
# wget http://download.fedoraproject.org/pub/epel/6/x86_64/epel-release-6-8.noarch.rpm
# rpm -ivh epel-release-6-8.noarch.rpm
```

If it is not enabled, set `enabled=1` in `/etc/yum.repos.d/epel.repo`

Installing Monitorix on RHEL/CentOS

Log in with root privileges. Download the *monitorix rpm* package, as follows:

```
# wget -c http://www.monitorix.org/monitorix-3.7.0-1.noarch.rpm
```



Figure 4: File system usage and I/O activity

Install the required packages:

```
# yum install rrdtool rrdtool-perl perl-libwww-perl perl-MailTools perl-MIME-Lite perl-CGI perl-DBI perl-XML-Simple perl-Config-General perl-HTTP-Server-Simple perl-IO-Socket-SSL
```

Install *monitorix rpm*:

To install *monitorix rpm* using yum should be at the same path where *rpm* package is downloaded. Remaining at the same path where *monitorix rpm* downloaded, run below command:

```
# yum install monitorix-3.6.0-1.noarch.rpm
```

Start the Monitorix service:

```
# service monitorix start
```

To make Monitorix start at boot time, type:

```
# chkconfig --level 345 monitorix on
```

Configuration

The main configuration file is `/etc/monitorix/monitorix.conf`. Before changing parameters, take a backup of this file:

```
# cp -pRvf /etc/monitorix/monitorix.conf /etc/monitorix/monitorix.conf_org
```

We can change the various parameters like the title, hostname, authentication, host allow, host deny in the *config* file. To make the changes, type:

```
title = <-----Set Title
hostname = <----Set hostname
<httpd_builtin>
    enabled = y
    host =
    port = 8080 <-----Set to required port
    user = nobody
    group = nobody
```