

```
; type 'redshift -l list' to see possible values.
; The location provider settings are in a different section.
location-provider=manual

; Set the adjustment-method: 'randr', 'vidmode'
; type 'redshift -m list' to see all possible values.
; 'randr' is the preferred method, 'vidmode' is an older API.
; but works in some cases when 'randr' does not.
; The adjustment method settings are in a different section.
adjustment-method=randr

; Configuration of the location-provider:
; type 'redshift -l PROVIDER:help' to see the settings.
; ex: 'redshift -l manual:help'
; Keep in mind that longitudes west of Greenwich (e.g. the
Americas)
; are negative numbers.
[manual]
lat=22.5
lon=-88.3

; Configuration of the adjustment-method
; type 'redshift -m METHOD:help' to see the settings.
; ex: 'redshift -m randr:help'
; In this example, randr is configured to adjust screen 1.
; Note that the numbering starts from 0, so this is actually
the
; second screen. If this option is not specified, Redshift
will try
; to adjust _all_ screens.
[randr]
screen=0
```



Note: I suggest that you do not use the screen option in the configuration file to adjust all screens, like external monitors too.

Making Redshift a start-up application: You can make Redshift start at boot using the status icon in Ubuntu. If you have any difficulty with the status icon, you can add Redshift to the start-up application, manually.

If you can't find the start-up application in your Linux distribution desktop environment, you can also add this file at

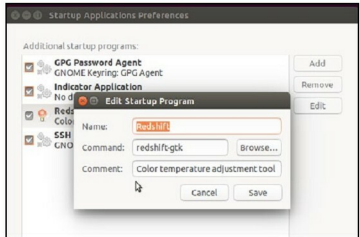


Figure 7: Adding applications manually to start-up applications

`~/config/autostart/redshift.desktop.`

```
[Desktop Entry]
Type=Application
Exec=redshift -O 3000
Hidden=false
NoDisplay=false
X-GNOME-Autostart-enabled=true
Name[en_IN]=Redshift
Name=Redshift
```

Redshift vs *f.lux*

The most important reason to use Redshift rather than *f.lux* is the freedom that comes with it. It is licensed under GPLv3 and works very well with GNU/Linux (it can be used for Windows too). The only disadvantage is that it can't be installed on OSX. If you face any difficulties with Redshift, you can report them at <https://github.com/jonls/redshift/issues/new>.

References

- [1] <http://jonls.dk/redshift/>
- [2] <https://github.com/jonls/redshift>

By: Tummala Dhanvi

The author is a security enthusiast who loves FREEdom software. He can be contacted at ghanvise_AT_gmail_DOT_com.

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource
ForYou

Your favourite Magazine on
Open Source is now on the Web, too.

OpenSourceForU.com

Follow us on Twitter@LinuxForYou