

Figure 5: Networking journal



Figure 6: Storage journal



Figure 7: Creating a new account

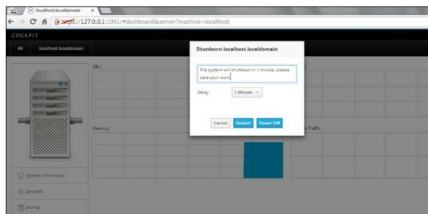


Figure 8: Shutdown

Provide the username as root and the root password, after which you will see a dashboard (Figure 2).

This dashboard is the main page where the administrator can view all the individual servers and machines. There is an *Add server* button to add a new server.

After the default server (the machine on which Cockpit is installed), the user is directed to details of the server.

Here, the administrator can monitor the CPU, disk, memory and network activities of the server.

One can control services using the *Service* tab in the left hand side column.

Cockpit views services using *systemd*. The administrator can get all network related information using *Networking* (Figure 5).

Cockpit provides a way to control hardware and perform various storage related tasks such as creating a RAID device, creating a volume group, etc, using the storage section, where the administrator can view the basic details of the storage hardware connected to the server as well as the storage journal logs (Figure 6).

User management can be also done using *User Accounts*. Adding a new user is very simple—just click *New Account* and a modal form is presented.

To create a UNIX user, fill in the details as required and click *Create* (Figure 7).

The administrator can also perform a shutdown or reboot from the Cockpit UI (Figure 8).

More reading and hacking

You can learn more about Cockpit at [Cockpit-Project.org](https://cockpit-project.org). You can also contribute to the Cockpit project using GitHub - <https://github.com/cockpit-project/cockpit/blob/master/HACKING.md> 

By Abhijeet Kasurde

The author is a Linux lover and FOSS evangelist. He loves to hack various open source software. Readers can reach him at abhijeetkasurde21@gmail.com