

```

try {
    // Create a ConnectionFactory
    ActiveMQConnectionFactory
    connectionFactory = new
    ActiveMQConnectionFactory(
        "tcp://localhost:61616");

    // Create a Connection
    Connection connection =
    connectionFactory.createConnection();
    connection.start();

    // Create a Session
    Session session = connection.
    createSession(false,
        Session.AUTO_
    ACKNOWLEDGE);

    // Create the destination (Topic
    or Queue)
    Destination destination =
    session.createQueue("TEST");

    // Create a MessageConsumer from
    the Session to the Topic or
    // Queue
    MessageConsumer consumer = session.
    createConsumer(destination);

    // Wait for a message
    Message message = consumer.receive(1000);

    if (message instanceof TextMessage) {
        TextMessage textMessage = (TextMessage) message;
        String text = textMessage.getText();
        System.out.println("Received: " + text);
    }

    consumer.close();
    session.close();
    connection.close();
} catch (Exception e) {
    System.out.println("Caught: " + e);
    e.printStackTrace();
}
}
}

```

Application 2 (Producer): Create a Maven project as shown in Figure 6 and add the same Maven dependency in pom.xml as Consumer Application.

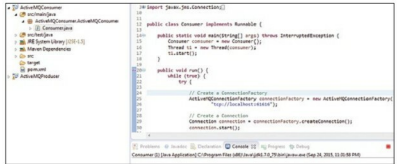


Figure 5: Consumer maven project

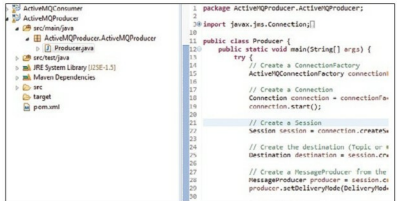


Figure 6: Producer maven project

```

Producer Class -
import javax.jms.Connection;
import javax.jms.DeliveryMode;
import javax.jms.Destination;
import javax.jms.MessageProducer;
import javax.jms.Session;
import javax.jms.TextMessage;
import org.apache.activemq.ActiveMQConnectionFactory;

public class Producer {
    public static void main(String[] args) {
        try {
            // Create a ConnectionFactory
            ActiveMQConnectionFactory connectionFactory = new
            ActiveMQConnectionFactory("tcp://localhost:61616");

            // Create a Connection
            Connection connection = connectionFactory.
            createConnection();
            connection.start();

            // Create a Session
            Session session = connection.createSession(false,
            Session.AUTO_ACKNOWLEDGE);

            // Create the destination (Topic or Queue)
            Destination destination = session.

```

Continued to page 67...