

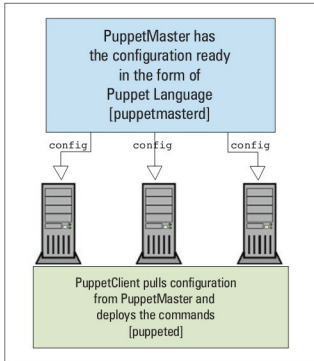


Figure 3: "Configuration Deployment"

the DNS resolution that starts with the word 'puppet', and will not accept anything else.

Start the server daemon

This can be done in two ways: Run `/etc/init.d/puppetmasterd` start with default values in `/etc/syslog/puppet.conf` (only in RPM formats), and set it to start at boot time with `chkconfig` or relevant commands in different OSs.

```
...or,
...run the following code snippets:
puppetmasterd --mkusers --onetime
puppetmasterd --masterport=8140 --logdest=/var/log/puppet/
puppetmaster.log
```

(This will create `/etc/puppet` and its contents, if Puppet was installed from source.)

Certificate authorisation

Nothing has to be done as part of setting up a CA server—other than listing and signing client certificates:

```
puppetca --list [-l] (this we get only when we start puppetd
daemon on the client, atleast once)
puppetca --sign [-s] <client-certificate that we see in the step
above>
```

Initial `/etc/puppet/manifests/site.pp`

(This also can be `init.pp`)

file

```
{
  "/tmp/puppet-test":
    ensure => present,
    owner => root,
    group => bin
}
```

Setting up PuppetClient

DNS resolution

This is the same as in PuppetMaster, and we need to be careful that our hostname is a fully qualified domain name. For example, just `'127.0.0.1 debian puppet'` won't do; `'127.0.0.1 debian.myhome puppet'` is required, and the hostname must sync with the entry in `/etc/hosts`.

Start the client daemon

To start with, we need to register with the CA server (that is part of puppetmasterd), since encrypted communication is mandatory.

```
puppetd --server=puppet --waitforcert=60 -dt
#(d = debug, t=test)
```

After this, we must sign the certificate to confirm the registration, as mentioned in the PuppetMaster section:

```
puppetca --sign debian.myhome
```

Schedule

It is better not to depend on `puppetd` to run as a daemon, since we wouldn't have control over the time that it needs to be run at, on hundreds of machines. It's better to set up a `cron` service via `crontab -e` to sync with the server every 15–30 minutes, or every one hour:

```
* /30 * * * * puppetd --server=puppet --onetime
```

In Part II of this series, we will deal with user and group creations. 

References

- [1] http://projects.puppetlabs.com/projects/puppet/wiki/Porting_Puppet_and_Facter_to_MSWin
- [2] http://projects.puppetlabs.com/projects/puppet/wiki/Downloading_Puppet
- [3] <http://fedoraproject.org/get-fedora>
- [4] <http://fedoraproject.org/wiki/EPEL>

By: Bejoy Abraham Mathews

The author is a free software enthusiast and works as a PeopleSoft ERP administrator at UST Global®, Technopark, Trivandrum. He plays an active role at the Service Innovation Department (also called the Apple Tree). At Apple Tree, in his free time, he deals with free software products available in the market to help SysAdmins and AppAdmins in the organisation to breathe easy on their daily tasks. He was RHCE Certified in 2004.