

```

$line_hollow->set_default_dot_style($default_hollow_dot);
$line_hollow->set_width( 1 );
$line_hollow->set_colour( '#6363AC' );
$line_hollow->set_values( $data_2 );
$line_hollow->set_key( "Students Getting First Class", 10 );

$y = new y_axis();
$y->set_range( 0, 100, 10 );

$x_label = new x_axis_labels();
$x_label->set_labels($labels);

$x = new x_axis();
$x->set_labels($x_label);

$chart = new open_flash_chart();
$chart->set_title( new title( 'Line Charts Example' ) );
$chart->set_y_axis( $y );
$chart->set_x_axis( $x );
//
// here we add our data sets to the chart:
//
$chart->add_element( $line_dot );
$chart->add_element( $line_hollow );

echo $chart->toPrettyString();
?>

```

In the above code, first connect to the database, and fire the query to fetch all rows in the table. The result set is saved in three different arrays; the first array has the 'Subjects', which is used to create the x axis label. The second and the third arrays save the data to be plotted.

Then get down to plot the data. First a dot object is created, and the size and colour defined. Then a new line object is created; the dot object is passed as dot style to the line. Then the width and colour of the line are set. Finally, set the data to be plotted, by passing the array containing the data to the `set_values` method. The key is set using the `set_key` method. Similarly, the next line object is created and the data to be plotted is passed to it.

Then the x axis and y axis objects are created. For y axis, the range is set as 0 – 100, with an interval of 10. For x axis, the labels are created by passing the labels array we have already saved.

Finally, the chart object is created, and the x and y axes are set, and the line objects are passed as elements to the chart. This completes the data file. You can download this file, `data_file.php`, from http://www.linuxforu.com/article_source_code/apr12/open_flash_source_code.zip and save it in the Web server root folder. Next, start with the HTML file to be used, which is as follows:

```

<html>
<head>

```

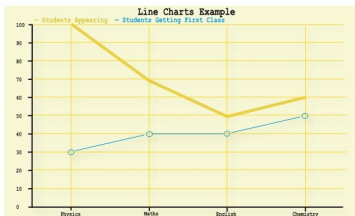


Figure 1: Created graph

```

<title></title>
<script type="text/javascript" src="js/swfobject.js"></script>
<script type="text/javascript">

swfobject.embedSWF(
    "open-flash-chart.swf", "line_chart",
    "500", "500", "9.0.0", "expressInstall.swf",
    { "data-file": "data_file.php" } );
</script>
</head>

<body>
<div id=line_chart">
</div>
</body>
</html>

```

In this HTML file, include the data file, `data_file.php`. The size of the graph to be plotted can be passed as arguments; here, 500 x 500 pixels. Next, add the `div 'line_chart'`, which is specified in the header as where to embed the Flash object. Save this file as `line_display.html` in the Web server root folder.

That's it!

When accessed through the browser, you can see the graph in action, as in Figure 1, which is a screenshot of the created graph. I hope you liked the article, and that it helps you in your work. Any queries or suggestions are most welcome. 

Links

- [1] See the above code in action at [http://goo.gl/E8PjI\[2](http://goo.gl/E8PjI[2)
- [2] OFC official site: <http://goo.gl/80kD3>
- [3] Line Charts methods reference: <http://goo.gl/Nf3eV>

By: Nitish Tiwari

The author is a FOSS enthusiast, currently working in a FOSS start-up. He is fond of bikes, travelling, Bollywood music, and of course, computers. He also runs www.opensource-blogs.com, a blog on open source tools. You can mail him at nitish.tiwari@technocube.in.