

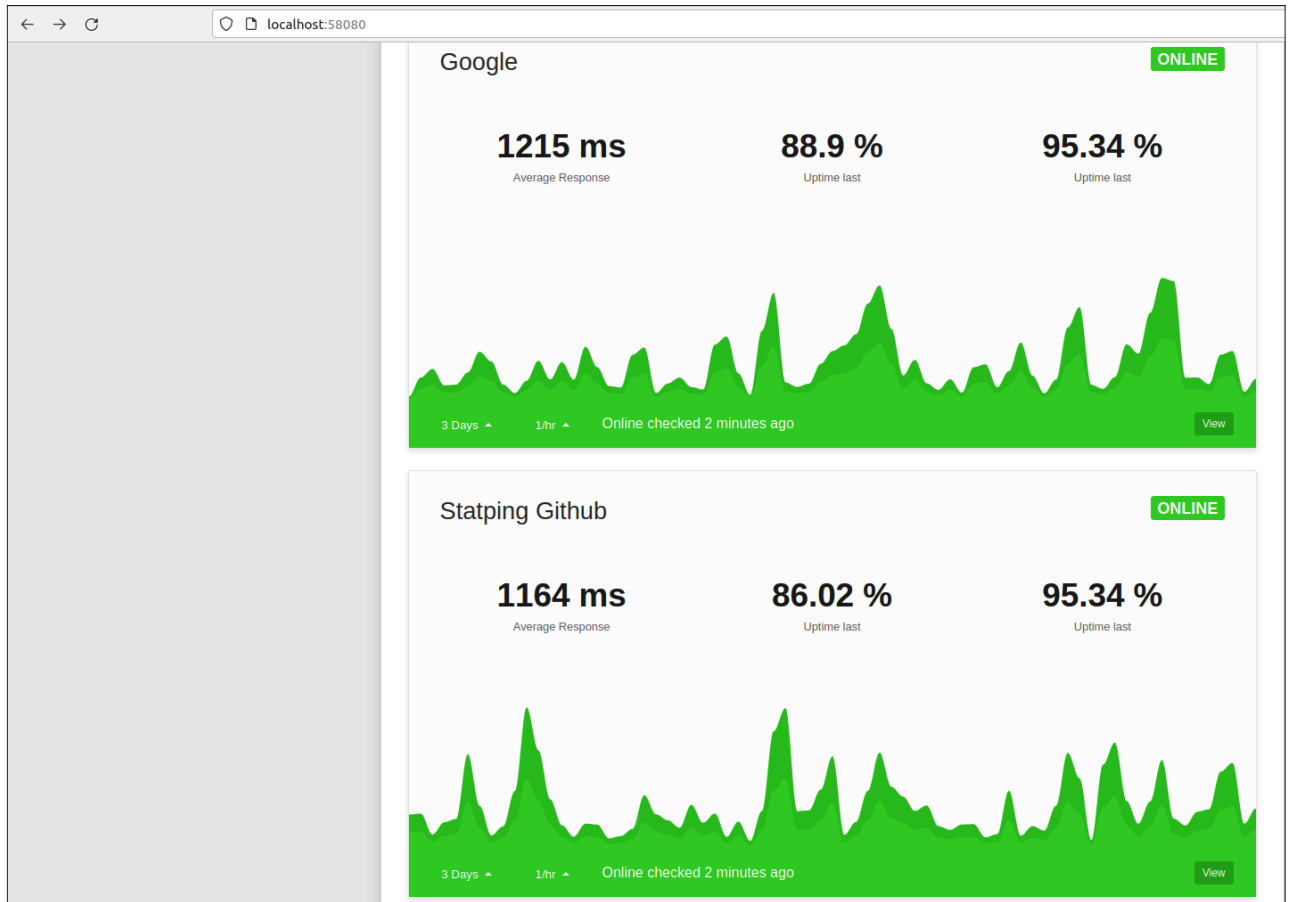


Figure 3: Statping-ng monitored services statistics

`docker build -f Dockerfile_MyStatpingNG . -t mystatpingng.`
 Now modify the `statpingng_stack.yml` as per the diff shown below to include the servers that statping-ng should monitor. Next, create the required `bind mount` directory for statping-ng using the command `mkdir config` and integrate the `services.yml` file shown below into the `config` directory. Finally, set up the correct owner for the `bind mount` directory with the command `chown -R root:root config` and bring up new statping-ng containers with the command used earlier.

Dockerfile_MyStatpingNG

FROM adamboutcher/statping-ng

CMD statping --port \$PORT -c /app/config.yml

diff statpingng_stack.yml

```
5c5
< image: adamboutcher/statping-ng:${SPNGTAG:-latest}
---
> image: mystatpingng:${SPNGTAG:-latest}
7a8,41
> volumes:
>   - ./config:/app
>
> environment:
>   - "DB_CONN=sqlite"
>   - "STATPING_DIR=/app"
>   - "SAMPLE_DATA=false"
>   - "GO_ENV=test"
>   - "NAME=StatpingNG Probes Demo"
>   - "DESCRIPTION=StatpingNG Probes Configuration Demo"
> restart: unless-stopped
>
> opensearch:
>   image: opensearchproject/opensearch:${OSRHTAG:-latest}
>   environment:
>     - "discovery.type=single-node"
> restart: unless-stopped
>
> kafka:
>   image: apache/kafka-native
>   environment:
>     KAFKA_LISTENERS: CONTROLLER://localhost:9091,HOST://0.0.0.0:9092,DOCKER://0.0.0.0:9093
>     KAFKA_ADVERTISED_LISTENERS: HOST://localhost:9092,DOCKER://kafka:9093
```