

```
> KAFKA_LISTENER_SECURITY_
PROTOCOL_MAP: CONTROLLER:PLAINTEXT,
DOCKER:PLAINTEXT,HOST:PLAINTEXT
> KAFKA_NODE_ID: 1
> KAFKA_PROCESS_ROLES:
broker,controller
> KAFKA_CONTROLLER_LISTENER_
NAMES: CONTROLLER
> KAFKA_CONTROLLER_QUORUM_
VOTERS: 1@localhost:9091
> KAFKA_INTER_BROKER_
LISTENER_NAME: DOCKER
> KAFKA_OFFSETS_TOPIC_
REPLICATION_FACTOR: 1
> restart: unless-stopped
>
> redis:
> image: redis:${RDSSTAG:-latest}
> command: "redis-server --save
60 1 --loglevel warning"
```

Finally, run the command `mkdir config` and create the `services config` file shown below at that location.

services.yml

```
x-tcpservice: &tcpservice
  type: tcp
  check_interval: 60
  timeout: 15
  allow_notifications: true
  notify_after: 0
  notify_all_changes: true
  public: true
  redirect: true

x-httpservice: &httpservice
  type: http
  method: GET
  check_interval: 45
  timeout: 10
  expected_status: 200
  allow_notifications: true
  notify_after: 2
  notify_all_changes: true
  public: true
  redirect: true

x-icmping: &icmping
  type: icmp
  check_interval: 60
  timeout: 15
```

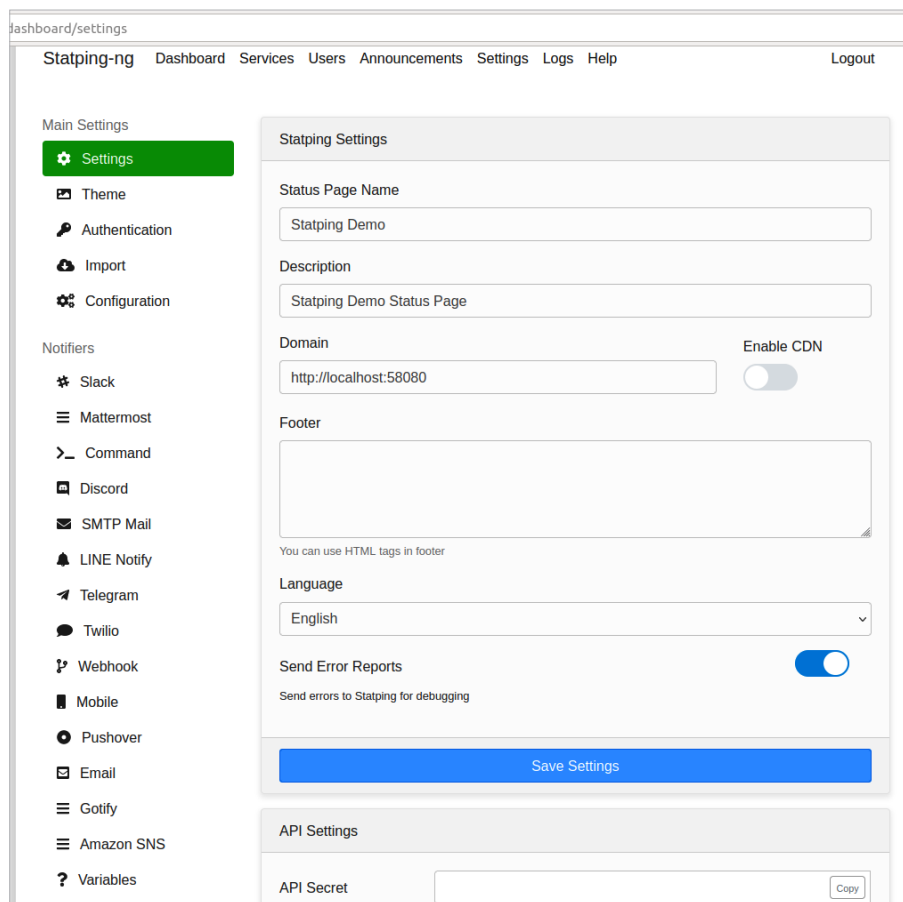


Figure 4: Statping admin page

```
allow_notifications: true
notify_after: 0
notify_all_changes: true
public: true
```

services:

```
  x-tcpservice: &tcpservice
    type: tcp
    check_interval: 60
  x-tcpservice: &tcpservice
    type: tcp
    check_interval: 60
    timeout: 15
    allow_notifications: true
    notify_after: 0
    notify_all_changes: true
    public: true
    redirect: true

  x-httpservice: &httpservice
    type: http
    method: GET
    check_interval: 45
    timeout: 10
```